




<b>Code:</b>	<b>COLD UNITS</b>	<b>Model:</b>
174141070	PREMIER KG 140 GN 2/1 DOUBLE GLASS DOOR REFRIGERATOR CABINET	PREMIER KG 140



### MAIN FEATURES

- \* GN 2/1 size refrigerator with double glass door
- \* 304 quality stainless steel
- \* Operating temperature +2/+12 °C
- \* Clean free condenser
- \* Maximum internal capacity minimal temperature increase during defrost
- \* Most efficient air distribution inside with a specially designed air channel
- \* The inner liners and inner lower base which are moulded comply with the highest hygiene standards with rounded corners and are made of stainless steel
- \* Monoblock design
- \* Automatic fan cutout switch and internal led light
- \* Wide magnetic removable gasket with triple insulation area provides an effective seal which reduces heat lost
- \* 40-42 kg/m<sup>3</sup> density environment friendly HFC-Free Polyurethane insulation for low energy consumption (78 mm)
- \* Protecting Class (IP2X)
- \* Ventilated cooling design
- \* Standart 4 rails with special design for each side of the middle inner sheet

### OPTIONS

- \* **Leg Option:** Leg/Castor
- \* **Shelf Option:** Nylon/Stainless
- \* **Plug Option:** UK/EU

### ACCESSORIES

- \* Master Key
- \* Set of Plastic Coated Shelf
- \* Set of Inox Shelf
- \* 430 Quality SS Double Door Cabinet Rails
- \* Set of Stainless Steel Leg
- \* Set of Ø100 Castor


### STANDARDS

- \* EN 60335-1 European Standard relating to safety of household and similar electrical appliances
- \* EN 60335-2-89 European Standard relating to particular requirements for commercial refrigerating appliances with an incorporated or remote refrigerant unit or compressor
- \* ISO 22041:2019 Refrigerated storage cabinets and counters for professional use Performance and energy consumption





<b>Code:</b>	<b>COLD UNITS</b>	<b>Model:</b>
174141070	PREMIER KG 140 GN 2/1 DOUBLE GLASS DOOR REFRIGERATOR CABINET	PREMIER KG 140

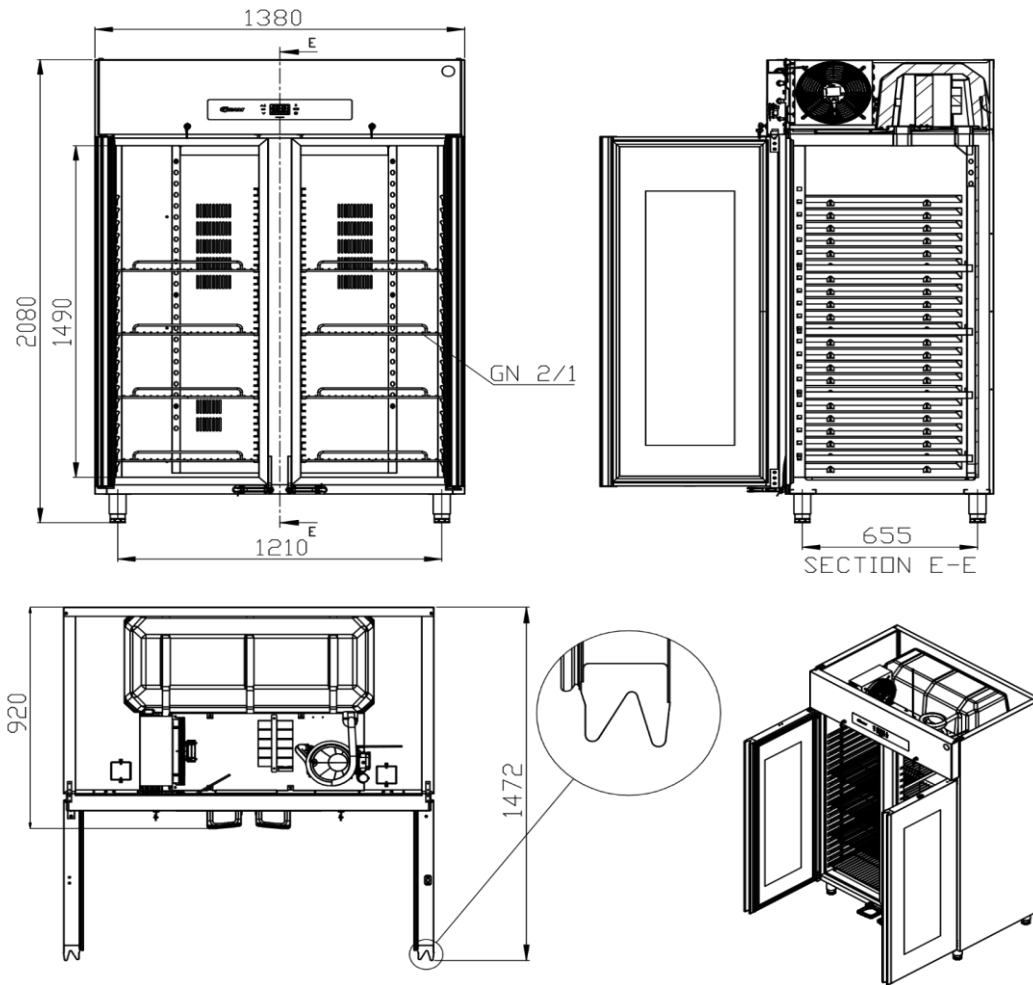

<b>DIMENSIONS (Net)</b>		<b>DIMENSIONS (Shipping)</b>	
* <b>Width (mm):</b>	1380	* <b>Width (mm):</b>	1420
* <b>Depth (mm):</b>	920	* <b>Depth (mm):</b>	880
* <b>Height (mm):</b>	2080	* <b>Height (mm):</b>	2150
* <b>Weight (kg):</b>	215	* <b>Weight (kg):</b>	230
		* <b>Volume (m³):</b>	2,69

<b>TECHNICAL SPECIFICATIONS</b>			
* <b>Gross Volume:</b>	1400 L	* <b>Cooling Temperature:</b>	+2/+12 °C
* <b>Net Volume:</b>	1085 L	* <b>Cooling Gas Type:</b>	R290
* <b>Climate Class:</b>	CC4 (+30 °C - %55 Rh)	* <b>Cooling Capacity:</b>	361 W (-10° / +45°)
* <b>Energy Efficiency Class:</b>	B	* <b>Supply Voltage:</b>	230V / NPE 50 Hz
* <b>Energy Efficiency Index:</b>	34,47	* <b>Protection Class:</b>	IP 2X
* <b>Energy Consumption:</b>	2,26 kW/24h	* <b>Cooling System Design:</b>	Ventilated
* <b>Connection Load:</b>	200 W	* <b>Sound Level:</b>	50 dB

