



PT1401

Key Features:

Stainless Steel Interior & Exterior

Designed To Operate In 43°C Ambient

Built-In Air Rear Duct For Even Temperature Distribution

R290 Hydrocarbon Refrigerant

Zero ODP Injected Polyurethane Insulation - 90mm

-2 / +4°C Refrigerator Temperature Range

Electronic Controller With Easy Read LCD Screen

Hot Gas Defrost

Door Locks Fitted As Standard

Rifle Bore Coated Evaporators

Ergonomic Flush Door Handle

Gastronorm Shelving System - Anti Tilt Slides

Hi / Lo Audio Visual Temperature Alarms

Condensing Unit Safety System To Protect Compressor From Blocked Condensers

Self Closing Doors

Heavy Duty Brake & Swivel Castors

Waste Heat Recovery Condensate Vaporiser System

Precision's durable all stainless steel top mount cabinets have been designed to provide commercial caterers with reliable, energy and cost efficient refrigerated storage solutions. Proudly made in the UK, these GN2/1 cabinets are capable of meeting the highest demands of commercial kitchens all around the world.



PT601

Options:

Extra Std Nylon Coated Shelves / Slides - GN2/1

Stainless Steel Shelves / Slides - GN2/1

Extra Shelf / Pan Slides

600 x 400 Bakery Racking - 20 Pairs Of Slides / Door

Fish Shelving - 8 x GN2/1 - 100mm Deep - Stainless Steel Pans & Slides per section with Slime Trays


Stainless Steel Back

Left Hand Hinged Door

Adjustable Legs

Remote - Excludes Condensing Unit But Includes Expansion and Solenoid Valve (Fitted)

Precision Connect

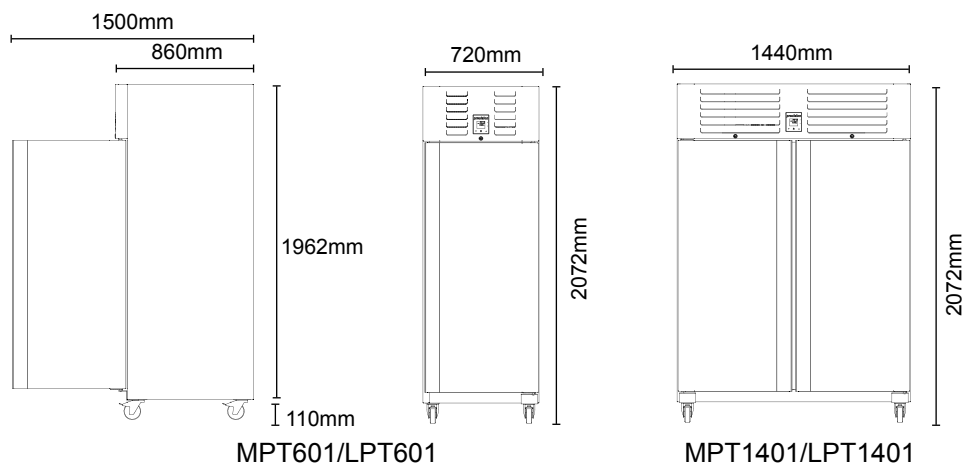

MPT601/LPT601

MPT1401/LPT1401

Model	MPT601	LPT601	MPT1401	LPT1401
Type	Refrigerator	Freezer	Refrigerator	Freezer
Material	ST/ST Int/Ext	ST/ST Int/Ext	ST/ST Int/Ext	ST/ST Int/Ext
Shelf Size	GN2/1	GN2/1	GN2/1	GN2/1
Number of Shelves	4	4	8	8
Max Number of Shelves (100mm Spacing)	14	14	28	28
Temperature Range	-2 / +4°C	-18 / -22°C	-2 / +4°C	-18 / -22°C
Exterior WxDxH (mm)	720x860x2072	720x860x2072	1440x860x2072	1440x860x2072
Net Usable Volume (litres)	460	460	933	933
Weight (KG)	138	146	210	230
Refrigerant / GWP	R290 / 3	R290 / 3	R290 / 3	R290 / 3
Refrigeration Watts (+45°C Condensing)	373	503	964	735
Evaporating Temp	-10°C	-30°C	-10°C	-30°C
Heat Rejection Watts*	569	892	1446	1102
Noise Output (dBa)	66	69	62	65
Power	230 / 50 / 1	230 / 50 / 1	230 / 50 / 1	230 / 50 / 1
Running Amps	1.3	2.7	4	3.1
Total Electrical Load - kW	0.30	0.62	0.92	0.71
Energy Consumption / 24hrs - kWh**	1.22	5	2.89	9.88
Energy Consumption / Year (AEC) - kWh**	445	1825	1055	3606
Energy Efficiency Class**	B	C	C	D

* Heat Rejection is taken at the listed evaporating and condensing condition. Watts is calculated by taking the total power of the cabinet.

** Tested to BS EN ISO 22041

We are constantly innovating and improving our products. Please always check our website for the most up-to-date version of this spec sheet