
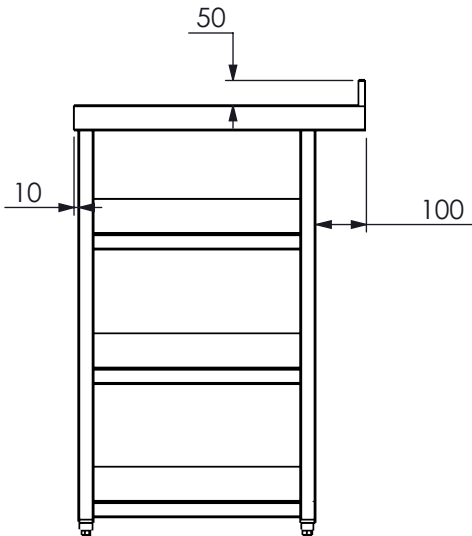
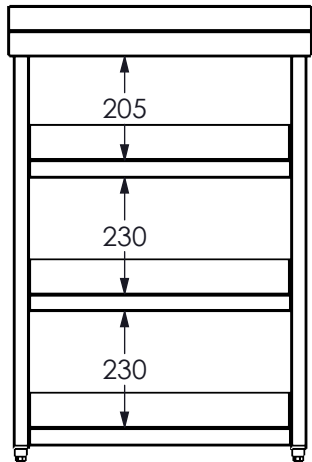
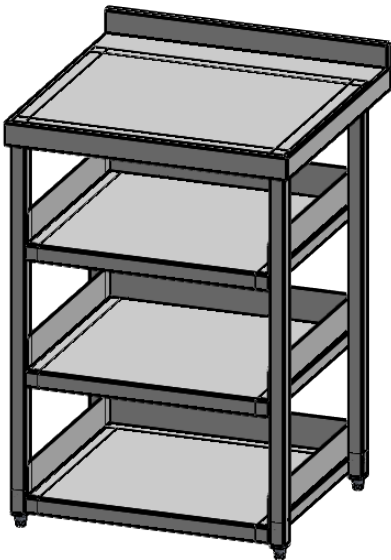


MB-SS6 Assembly

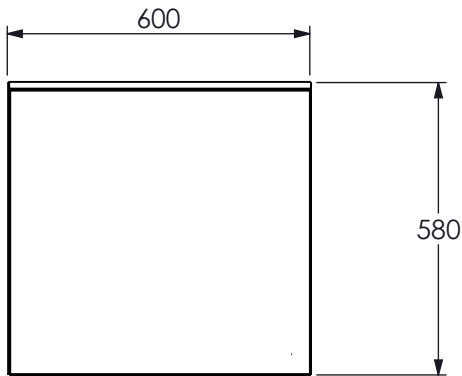

MATERIAL:	Stainless Steel
GRADE:	
THICKNESS:	
FINISH:	240 Grit

Unless otherwise specified dimensions are in millimeters.
Tolerance: ± 0.5
Angular: ± 0.5
PD = Paper Down
PU = Paper Up
BD = Burrs Down
BU = Burrs Up
No allowance has been made on the drawing for push through values.

Please allow the following for stainless steel bends in a 10mm V:
Steel Push Through Value
0.8MM S/S = 0.92MM
0.9MM S/S = 0.92MM
1.2MM S/S = 1.27MM
1.5MM S/S = 1.45MM
2 MM S/S = 1.74MM
For any other materials or V sizes please see the Amada Handbook



PRODUCT:	FB-SS6 Assembly	CONFIG:	N/A
PART NAME:			
DWG LOCATION:	I:\1 PRODUCT RANGE\FLEXI-BAR\Shelving Station\SS6\		
COPYRIGHT (C) PARRY CATERING EQUIPMENT (MIDLANDS) LTD			

DRAWN:	StefanL
REVISION:	1
CREATION DATE:	15/02/2023
LAST UPDATED:	27/02/2023