


Other models in this range:
 MF 46 - MF 47 - MF 56
 MF 58 - MF 66 - MF 68
 MF 69 - MF 86 - MF 88

Modular Super-Flake Ice Machine up to 700 kg



PS plastic top cover



Electronic Controls



Stainless Steel



2xMF 69+UBH1100
(sold separately)



2xMF 69+UBH1600
(sold separately)



MF 69+UBH2250
(sold separately)



MF 69+RBCSTAND
(sold separately)



MF 69+SIS700
(sold separately)



2xMF 69+SIS1350
(sold separately)



Features

- Modular super-flake ice machine, to be connected with R 744 remote condensing unit or central cooling system (LT)
- Stainless steel scotch-brite finish.
- Side panels with rounded corners for enhanced ease of cleaning and aesthetics;
- Top cover in PS plastic .
- Removable side panels on all four sides to ease maintenance and after-sales service operations.
- AISI304 Stainless steel evaporator developed for operating pressures up to 60 bar
- Electronic expansion valve model CAREL E2V
- Electronic pc board to check evaporator alarms, gear box speed, evaporating temperature, water level
- Electronic control board for expansion valve CAREL with temperature and pressure probes
- KVR - Suction pressure regulating valve
- Safety valve on high pressure line (max. 47 bar)

Technologies MF 59



	24h 10°C : 10°C [kg] [lb]		21°C : 15°C [kg] [lb]		W D H [WxDxH mm] 538x663x790
MF 59 Split	700	1543	650	1433	
					[WxDxH inches] 213/16" x 261/8" x 311/8"
	[V/Hz/Ph] 230/50-60/1		R 744 (CO ₂)		



Super-flake ice, extruded just below 0° Celsius, retains only 15-18% of residual water, making it relatively dry and compact.

Residual water content 15%

This product qualifies for the following listings:



Certified ISO 9001

2 Years Warranty

Subject to certain limitations and exclusions

Download our free App **Scotsman Ice**


Available on:
 Apple store
 Google play
 Windows store



www.scotsman-ice.it
www.scotsman-ice.com

Other models in this range:
 MF 46 - MF 47 - MF 56
 MF 58 - MF 66 - MF 68
 MF 69 - MF 86 - MF 88

Modular Super-Flake Ice Machine up to 700 kg

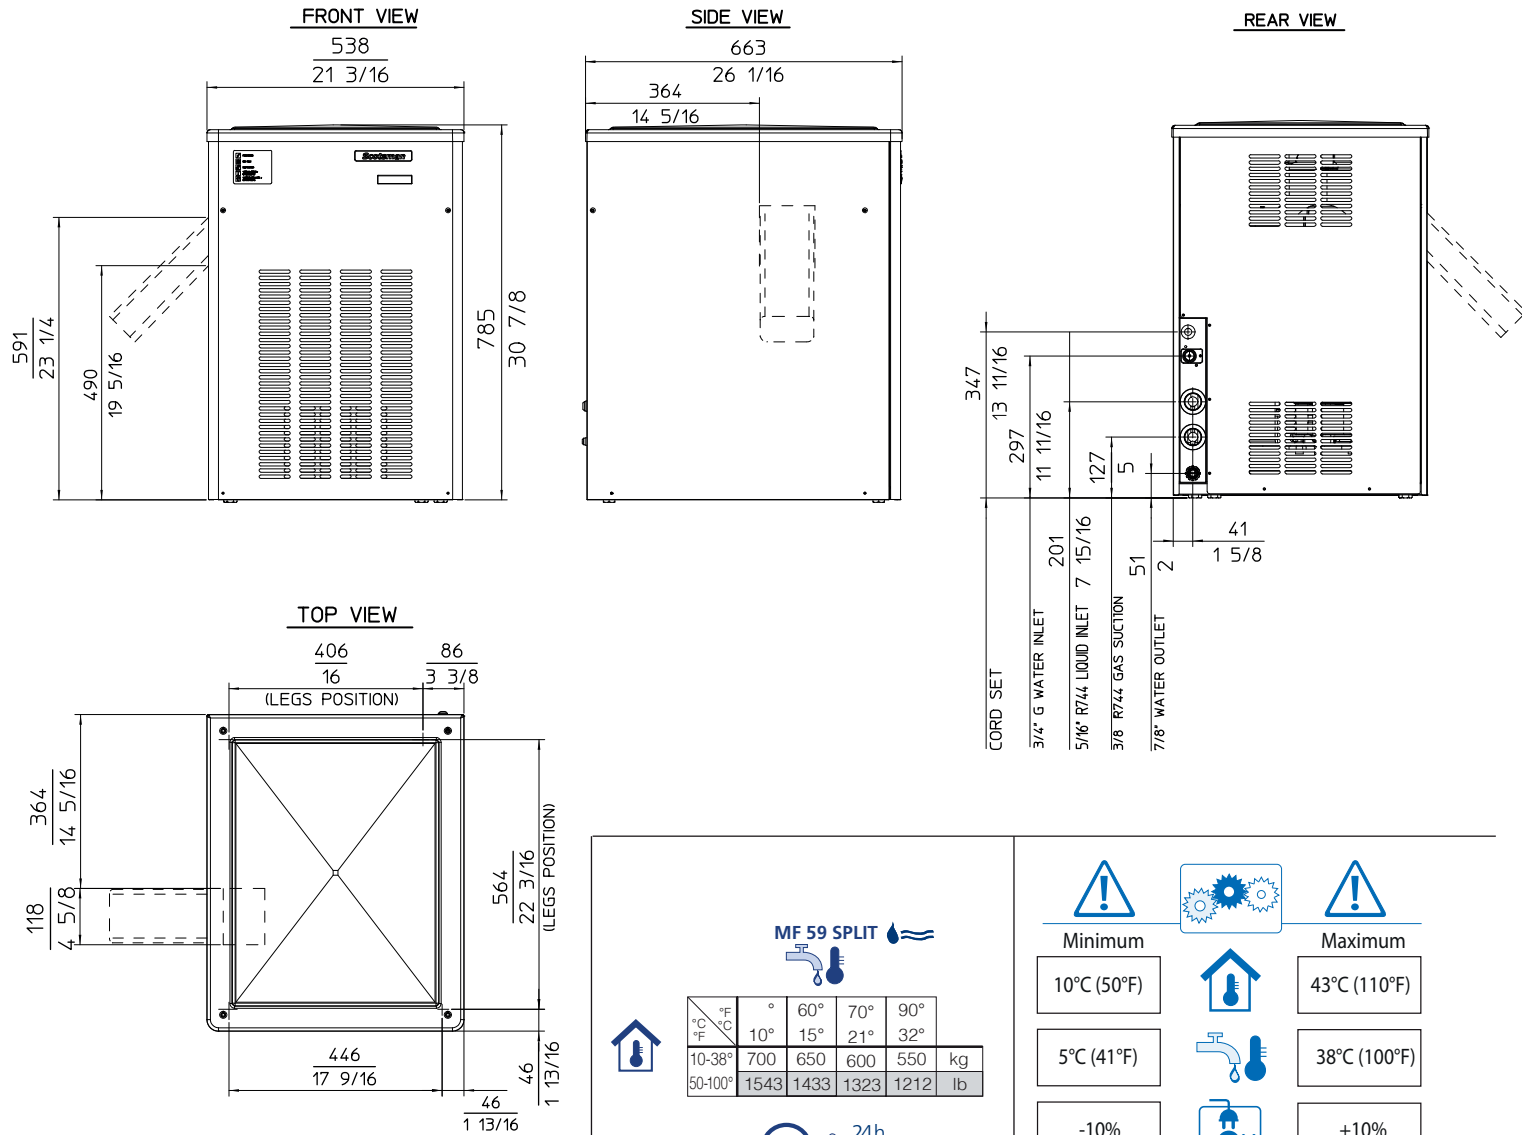

MF 59 SPLIT

°C / °F	10° / 50°	15° / 60°	21° / 70°	32° / 90°	
10-38°	700	650	600	550	kg
50-100°	1543	1433	1323	1212	lb

24h

Minimum	Maximum
10°C (50°F)	43°C (110°F)
5°C (41°F)	38°C (100°F)
-10%	+10%
1 bar 14 psi	5 bar 70 psi

	R744 (Te = -21°C/-6°F, Tcond <4°C)			
	[W]	[Btu/h]	[W] [A]	[kg] [lbs]
MF 59 split	3000-3500	10236-11942	200 0,7	64 141 73 161

IMPORTANT NOTICE:
 Models and specifications are subject to change without notice.
 This spec sheet is meant for commercial purpose only.
 For technical documentation please refer to our service manuals.

www.scotsman-ice.it
www.scotsman-ice.com