

Other models in this range:  
 MF 46 - MF 47 - MF 56 - MF 57  
 MF 58 Split - MF 59 Split - MF 66  
 MF 69 Split - MF 86 - MF 88 Split

## Modular Super-Flake Ice Machine up to 1220 Kg



Stainless Steel    Electronic Controls




### Features

- Modular Superflake ice machine, production up to 1,220 kg in 24 hours
- Split unit, supplied with evaporator only, needs to be connected to remote condensing unit or central cooling system (low temperature)
- Stainless steel auger and freezing cylinder (evaporator)
- Equipped with an electronic control board
- Ice breaker made in specially strengthened alloy, allowing for greater extrusion pressure to deliver a dryer-quality of ice (85% dry).
- Long-lasting stainless steel ball-bearings.
- Double protection – electronic rotation sensor and drive coupling -on gear motor and gear reducer
- Low- water sensor protection on refrigeration and gear motor system
- Optical ice level sensor for machine shut down.
- Stainless steel side panels in scotch-brite finish, with rounded corners for enhanced ease of cleaning and aesthetics.
- Side panels are removable on all four sides to ease maintenance and after-sales service operations.
- ABS plastic top cover.
- Reduced height to ease installation.

### Optional Features (special order):

- UV lamp for bacterial control.
- Anti-scale, anti-algae water filtration system.

### MF 68 Split Technologies



|             |           |       |           |       |                           |
|-------------|-----------|-------|-----------|-------|---------------------------|
|             |           |       |           |       |                           |
|             | 10°: 10°C |       | 21°: 15°C |       |                           |
|             | [kg]      | [lbs] | [kg]      | [lbs] | [WxDxH mm]                |
| MF 68 Split | 1220      | 2690  | 1170      | 2578  | 538x663x790               |
|             |           |       |           |       | [WxDxH inches]            |
|             |           |       |           |       | 213/16" x 261/8" x 311/8" |
|             |           |       |           |       |                           |
|             | [v/Hz/ph] |       | R 404 A   |       |                           |
|             | 230/50/1  |       |           |       |                           |



Super-flake ice, extruded just below 0° Celsius, retains only 15-18% of residual water, making it relatively dry and compact.

Residual water content 15%

This product qualifies for the following listings:



**2** Years Warranty

Subject to certain limitations and exclusions


Certified ISO 9001:2000

[www.scotsman-ice.it](http://www.scotsman-ice.it)  
[www.scotsman-ice.com](http://www.scotsman-ice.com)  
[www.scotsman-ice-on-tablet.com](http://www.scotsman-ice-on-tablet.com)

Models and specifications are subject to change without notice.

Other models in this range:  
 MF 46 - MF 47 - MF 56 - MF 57  
 MF 58 Split - MF 59 Split - MF 66  
 MF 69 Split - MF 86 - MF 88 Split

## Modular Super-Flake Ice Machine up to 1220 Kg

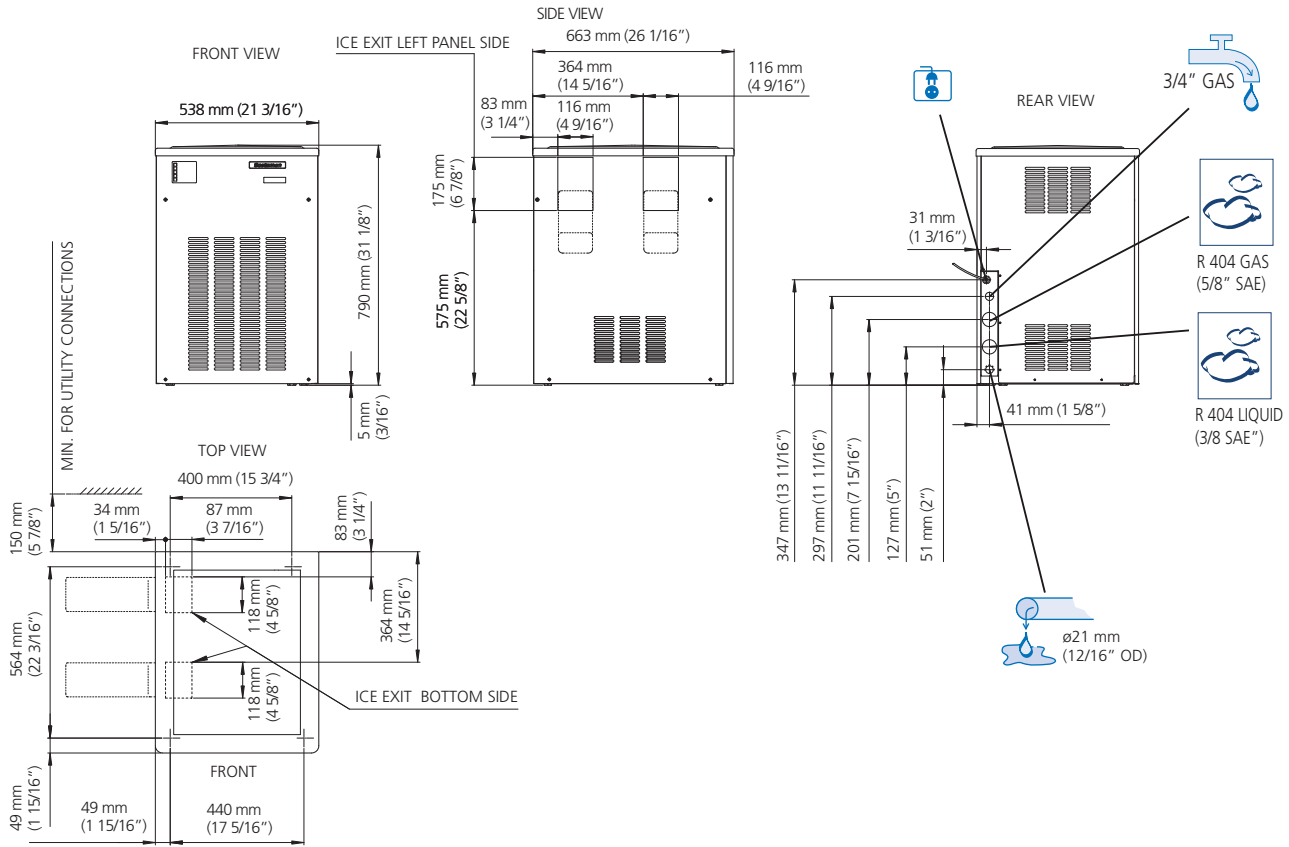

**MF 68 SPLIT**

|         |      |      |      |      |     |
|---------|------|------|------|------|-----|
|         | 50°  | 60°  | 70°  | 90°  |     |
| °C      | 10°  | 15°  | 21°  | 32°  |     |
| °F      | 50   | 60   | 70   | 90   | kg  |
| 10-38°  | 1220 | 1170 | 1100 | 900  |     |
| 50-100° | 2690 | 2579 | 2425 | 1984 | lbs |



|                 |  |                 |
|-----------------|--|-----------------|
|                 |  |                 |
| Minimum         |  | Maximum         |
| 10°C (50°F)     |  | 40°C (104°F)    |
| 5°C (41°F)      |  | 35°C (95°F)     |
| -10%            |  | +10%            |
| 1 BAR<br>14 psi |  | 5 BAR<br>70 psi |

|             |      |  |         |  |         |            |            |
|-------------|------|--|---------|--|---------|------------|------------|
|             |      | R404A/R507<br>(T. ev: -16°C or 3,2°F; T. cond. +40°C or 104°F) |         |  |         |            |            |
|             | [W]  |  | [Btu/h] |  | [W] [A] | [kg] [lbs] | [kg] [lbs] |
| MF 68 Split | 4600 |  | 15686   |  | 400 1,4 | 98 216     | 107 235    |