


Other models in this range:
 MF 46 - MF 47 - MF 56
 MF 58 - MF 59 - MF 66
 MF 68 - MF 86 - MF 88

Modular Super-Flake Ice Machine up to 1400 kg



PS plastic top cover



Electronic Controls



Stainless Steel



2xMF 69+UBH1100
(sold separately)



2xMF 69+UBH1600
(sold separately)



MF 69+UBH2250
(sold separately)



MF 69+RBCSTAND
(sold separately)



MF 69+SIS700
(sold separately)



2xMF 69+SIS1350
(sold separately)



Features

- Modular super-flake ice machine, to be connected with R 744 remote condensing unit or central cooling system (LT)
- Stainless steel scotch-brite finish.
- Side panels with rounded corners for enhanced ease of cleaning and aesthetics;
- Top cover in PS plastic .
- Removable side panels on all four sides to ease maintenance and after-sales service operations.
- AISI304 Stainless steel evaporator developed for operating pressures up to 60 bar
- Electronic expansion valve model CAREL E2V
- Electronic pc board to check evaporator alarms, gear box speed, evaporating temperature, water level
- Electronic control board for expansion valve CAREL with temperature and pressure probes
- KVR - Suction pressure regulating valve
- Safety valve on high pressure line (max. 47 bar)

Technologies



	24h 10°C: 10°C [kg] [lb]		21°C: 15°C [kg] [lb]		W D H [WxDxH mm] 538x663x790
MF 69 Split	1400	3086	1300	2866	
					[WxDxH inches] 213/16" x 261/8" x 311/8"
	[V/Hz/Ph] 230/50-60/1		R 744 (CO ₂)		



Super-flake ice, extruded just below 0° Celsius, retains only 15-18% of residual umidity, making it relatively dry and compact.

Residual umidity content 15%

This product qualifies for the following listings:



Certified ISO 9001

2 Years Warranty

Subject to certain limitations and exclusions

Download our free App **Scotsman Ice**


Available on:
 Apple store
 Google play
 Windows store



www.scotsman-ice.it
www.scotsman-ice.com

Other models in this range:
 MF 46 - MF 47 - MF 56
 MF 58 - MF 59 - MF 66
 MF 68 - MF 86 - MF 88

Modular Super-Flake Ice Machine up to 1400 kg

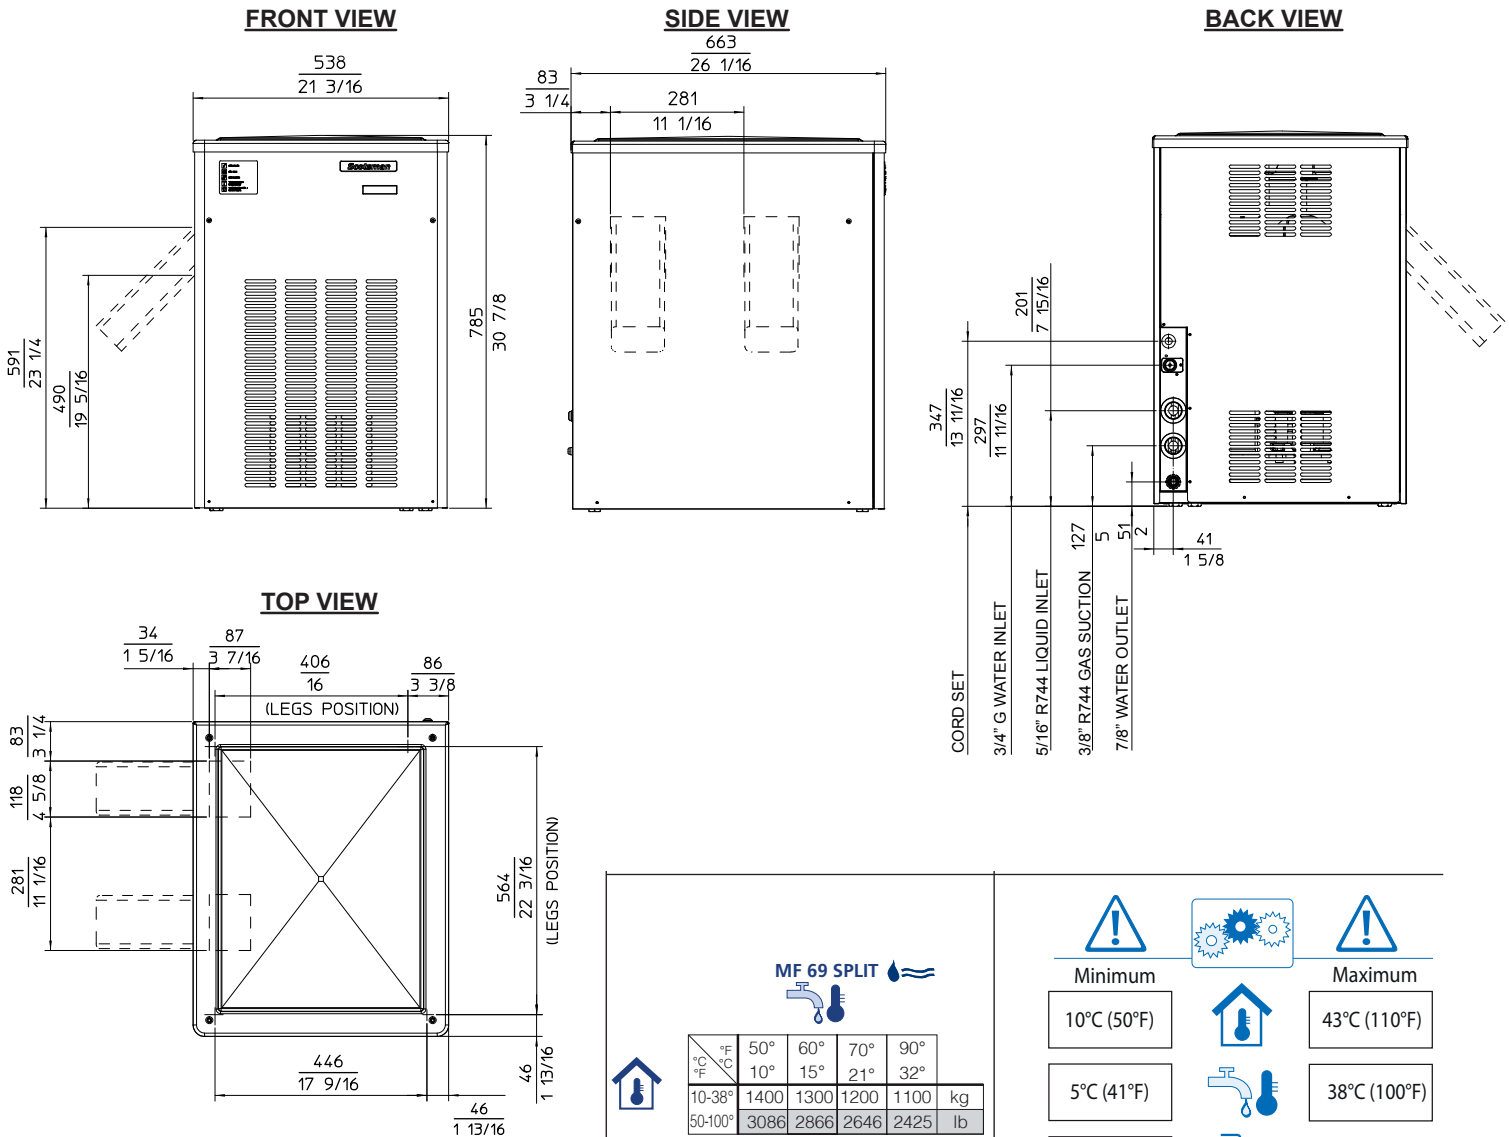

MF 69 SPLIT

	50° 10°	60° 15°	70° 21°	90° 32°	
10-38° 50-100°	1400 3086	1300 2866	1200 2646	1100 2425	kg lb

24h

Minimum		Maximum
10°C (50°F)		43°C (110°F)
5°C (41°F)		38°C (100°F)
-10%		+10%
1 bar 14 psi		5 bar 70 psi

	 R744 (Te = -21°C/-6°F, Tcond <4°C)			
	[W]	[Btu/h]	[W] [A]	[kg] [lb]
MF 69 split	6000-7000	20472 - 23884	400 1,5	103 227 112 247

IMPORTANT NOTICE:
 Models and specifications are subject to change without notice.
 This spec sheet is meant for commercial purpose only.
 For technical documentation please refer to our service manuals.

www.scotsman-ice.it
www.scotsman-ice.com