

SINGLE-LOAD FRONT-LOAD WASHERS – 50 Hz

MHN33



DURACORE DRIVE SYSTEM

- DuraCore Drive System is designed and tested to run 15,000 cycles*
- Watertight, flexible triple-lip seal with garter spring keeps moisture away from the shaft, protecting the premium bearings
- Durable shaft sleeve is designed to eliminate shaft wear




INTELLIGENT CONTROLS WITH M-SERIES TECHNOLOGY

- Offer flexibility and individual cycle pricing options for optimal earnings
- One-touch cycle selection allows end users to easily choose their preferred wash selection
- Built-in diagnostics help streamline service calls



ADVANCED SPIN TECHNOLOGY

- Delivers more consistent cycle times**
- Offers automatic load balancing through a six-point suspension to provide optimal stability for the entire wash unit



BUILT TO LAST

- Front-access panel — easy to remove, which streamlines service by providing fast access to internal components
- Heavy-duty die-cast door hinge — opens 180° and is built to withstand the rigors of commercial laundry
- Accelerometer — takes an accurate reading of cabinet vibration and allows the washer to expand on final spin speed limits
- Durable soap dispenser — its sturdiness adds to the machine's overall durability



COIN READY
MHN33PDCGW (pictured)



CARD READER READY & NON-VEND
MHN33PNCGW (pictured)

SINGLE-LOAD FRONT-LOAD WASHER MODELS — 50 Hz

PAYMENT CONFIGURATION	MODEL NUMBER
Coin Ready	MHN33PDCGW
Card Reader Ready & Non-Vend	MHN33PNCGW



AMERICA
AN AMERICAN COMPANY FOR OVER 100 YEARS

See maytagcommerciallaundry.com for warranty details.

*Based on 11-lb load, 34 min. timed cycle, Heavy Soil.
**Compared to previous model, MHN30, based on 17-lb load.

VISIT MAYTAGCOMMERCIALLAUNDRY.COM FOR MORE INFORMATION.


®/™ © 2020 Maytag. All rights reserved.
MY200018 5/20

SINGLE-LOAD FRONT-LOAD WASHERS – 50 Hz

MHN33



SIDE VIEW

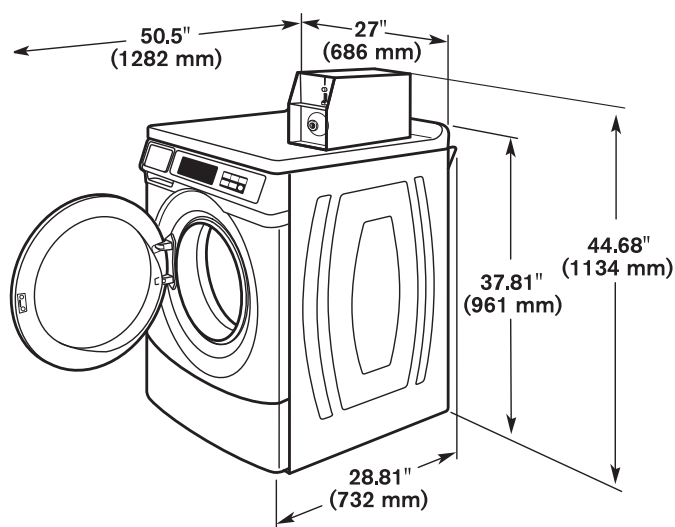

MODELS	MHN33 (PD)	MHN33 (PN)
PAYMENT CONFIGURATION	COIN READY	CARD READER READY/NON-VEND
CAPACITY		
Cylinder Volume — cu. ft. (liters)	3.1 (88)	3.1 (88)
Cylinder Diameter — in. (mm)	21.6 (547)	21.6 (547)
Cylinder Depth — in. (mm)	13.4 (341)	13.4 (341)
DIMENSIONS		
Depth — in. (mm)	28.81 (732)	28.81 (732)
Width — in. (mm)	27 (686)	27 (686)
Height — in. (mm)	44.68 (1,134)*	37.81 (961)
Door Opening — in. (mm)	14.25 (362)	14.25 (362)
CRATED DIMENSIONS		
Crated Width — in. (mm)	29 (737)	29 (737)
Crated Depth — in. (mm)	33-½ (851)	33-½ (851)
Crated Height — in. (mm)	48 ½ (1,232)	40 ½ (1,029)
APPROXIMATE WEIGHT		
Uncrated — lb (kg)	245 (111)	235 (107)
Crated — lb (kg)	254 (115)	244 (111)
ELECTRICAL REQUIREMENTS		
Voltage	220–240V	220–240V
Frequency	50Hz	50Hz
Breaker/Fuse — Amps	10	10
WATER INLET HOSE/DRAIN HOSE		
Operating Pressure — psi (bar)	20–100 (1-8)	20–100 (1-8)
Inlet Hose Length — ft (m)	4 (1.22)	4 (1.22)
Drain Hose Length — ft (m)	6 (1.83)	6 (1.83)
APPROXIMATE WATER USAGE		
Average Total Water Usage Per Cycle — gallons (liters)	10.71 (40.50)**	10.71 (40.50)**
Average Hot Water Usage Warm Water Cycle — gallons (liters)	.71 (2.69)	.71 (2.69)
Average Hot Water Usage Hot Water Cycle — gallons (liters)	2.71 (10.26)	2.71 (10.26)
Extract Speed — Max G-Force/Max RPM	300/1,000	300/1,000
Motor Size — hp (kW)	.09 (.07)	.09 (.07)



*Includes height of metercase.

**Based on 2018 United States DOE J2 testing with factory preset cycles.

Dimensions are for planning purposes only. See specific instructions for proper installation. Because of continuous product improvement, Maytag reserves the right to change specifications without notice.