

Scotsman[®]

Modular Ice Machine up to 190 kg

Item #:
Project:
Quantity:



FEATURES

- Vertical Cube System.
- T304 Stainless Steel Panels.
- Auto-alert Indicator Lights.
- Global standard footprint: strictly follows international imperial standards commonly adopted in the industry of reference.
- One touch cleaning: reduces labor costs and saves time and simplifies cleaning process.
- Front evaporator access: immediate access to the evaporating plate for quick self-maintenance operations.
- Head only ice maker: requires a separate storage bin to collect the ice produced.

Head

NW 307



NW 307 Dice 10 g W 22 x D 22 x H 22 mm



NW H 307 Half Dice 6 g W 10 x D 22 x H 28 mm



NW L 307 Large Dice 15 g W 28 x D 22 x H 28 mm CONDENSING **SYSTEM**

Air cooled

REFRIGERANT GAS

R290

VOLTAGE V/Hz/ph

230/50/1

LEGEND:

✓ : Perfect combination between ice maker and bin : Ice chute cut-out performed upon installation

RECOMMENDED BINS

SB193

SB322

SB393

SB530

Bins

CBT30EMCD

CBT30EMCD

CBTxxxxxxxxx : need additional bin top

ications:



Minimum

	Minimum Maximum		
Air temperature	10°C	43°C	
Water temperature	5°C	38°C	
Water pressure	1 bar (14 psi)	5 bar (70 psi)	
Electrical voltage	-10%	+10%	

OPERATING REQUIREMENTS

MPORTANT NOTICE:

and specifications are si ithout notice. c sheet is meant for com ose only. For technical documentation please refer to our service manuals. Download our free App Scotsman Ice Apple store Google play Windows store

www.scotsman-ice.it www.scotsman-ice.com kg

129

168

181

243


30 October 2018





Modular Ice Machine up to 190 kg

Item #: Project: Quantity:

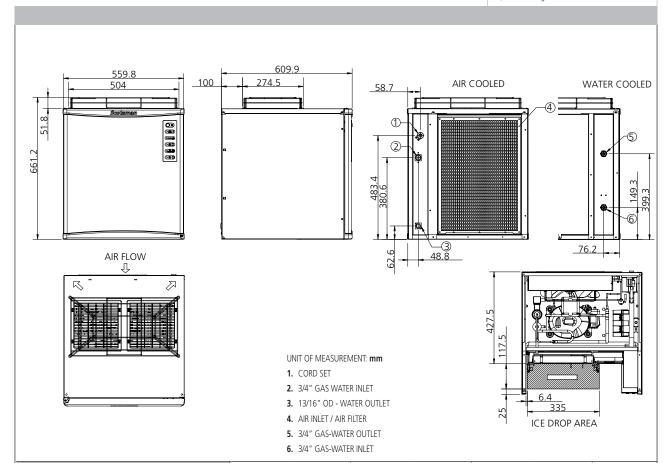

UNIT DATA

Size (W x D x H) 558 x 610 x 609 mm

Net weight 54 kg

		Compressor		Circuit wires		Max. fuse size	
Version	Voltage	Btu/h	W	No.	Ømm²	Α	
NW 307 AS	230/50/1	10035	2941	3	1.5	16	
NW H 307 AS	230/50/1	10035	2941	3	1.5	16	
NW L 307 AS	230/50/1	10035	2941	3	1.5	16	

SHIPPING DATA

Carton (W x D x H) 620 x 680 x 800 mm

Weight 63 kg

			24 h ice production kg °C Amb. / °C Water		Energy consumption*		Water usage*	Instant power	
Version	Condensation	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/100 kg	kWh/24h	l/h	W
NW 307 AS	Air	230/50/1	190	175	120	15.9	19.0	8.3	910
NW H 307 AS	Air	230/50/1	160	164	118	16.8	19.8	8.1	910
NW L 307 AS	Air	230/50/1	190	180	130	14.2	18.5	9.0	910

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions