

Opus SelfCooking Center® 5 Senses

Key Features

- Type: Electric
- Dry heat, moist heat, combination mode
- Clear touch screen control panel with pictograms
- Intelligent Cooking Control
- iLevelControl shelf monitoring
- CalcDiagnosis®/limescale monitoring
- HiDensity Control® maximising capacity
- Store up to 300 programs with 12 steps
- Efficient CareControl® self cleaning system
- Automatic control of the cooking climate
- 5 fan speeds
- Core temperature probe with 6 measuring points
- Fresh steam generator
- Cool down function
- Double glazed doors
- Stores HACCP data downloadable to a PC
- Delta-T cooking
- Compatible with GN sizes 1/1, 1/2, 2/3, 1/3, 1/4
- Auto alerts when service required



OSCWE61

Construction

- Body: stainless steel grade 304
- Oven liner: stainless steel type 304
- CrNi steel DIN 1.4301

Available Options


- Left hinged door (selected models)
- Integral fat drain (selected models)
- Hinging rack for bakery option
- Integral hand shower
- Safety door lock
- Marine version
- Security/prison version
- Lockable control panel
- Connection to serial interface

Available Accessories

- Stands & bases
- Mobile oven rack for GN containers
- Transport trolley
- Mobile banqueting plate rack
- CombiDuo stacking kits
- UltraVent condensation hood
- UltraVentPlus condensation hood
- Exhaust hood
- Thermocover insulating hood
- Banqueting Finishing® System
- Cleaner tablets and rinse aid tablets
- Pressure spray gun for cleaning
- Electric hand pump for descaling
- CombiLink
- GN containers, grids, trays
- Chicken grid & Duck grid
- CombiFry basket
- GriddleGrid
- Grease drip collector
- Potato Baker
- MultitBaker
- Grill & Pizza tray

Specifications

Model	OSCWE61	OSCWE62	OSCWE101	OSCWE102	OSCWE201	OSCWE202
Capacity (1/1GN)	6	12	10	20	20	40
No. of meals per day	30 - 80	60 - 160	80 - 150	150 - 300	150 - 300	300 - 500
External height (mm)	782	782	1042	1042	1782	1782
External width (mm)	847	1069	847	1069	879	1084
External depth (mm)	771	971	771	971	791	996
Net weight unpacked (kg)	110	143	136	182	258	332
Gross weight packed (kg)	123	178	152	227	312	442
Shipping volume (m ³)	0.83	1.06	1.06	1.1	2.03	3.14
Water pressure (kPa)	150 - 600	150 - 600	150 - 600	150 - 600	150 - 600	150 - 600
Water connection (BSP)	3/4	3/4	3/4	3/4	3/4	3/4
Total power rating (kW)	11	22.3	18.6	36.7	37	65.5
Electrical supply 3N~+E 400V 50-60Hz	L1-15.9 L2-15.9	L1-32.2 L2-32.2	L1-26.8 L2-26.8	L1-53.0 L2-53.0	L1-53.5 L2-53.5	L1-94.6 L2-94.6
Current Rating (A)	L3-15.9	L3-32.2	L3-26.8	L3-53.0	L3-53.5	L3-94.6

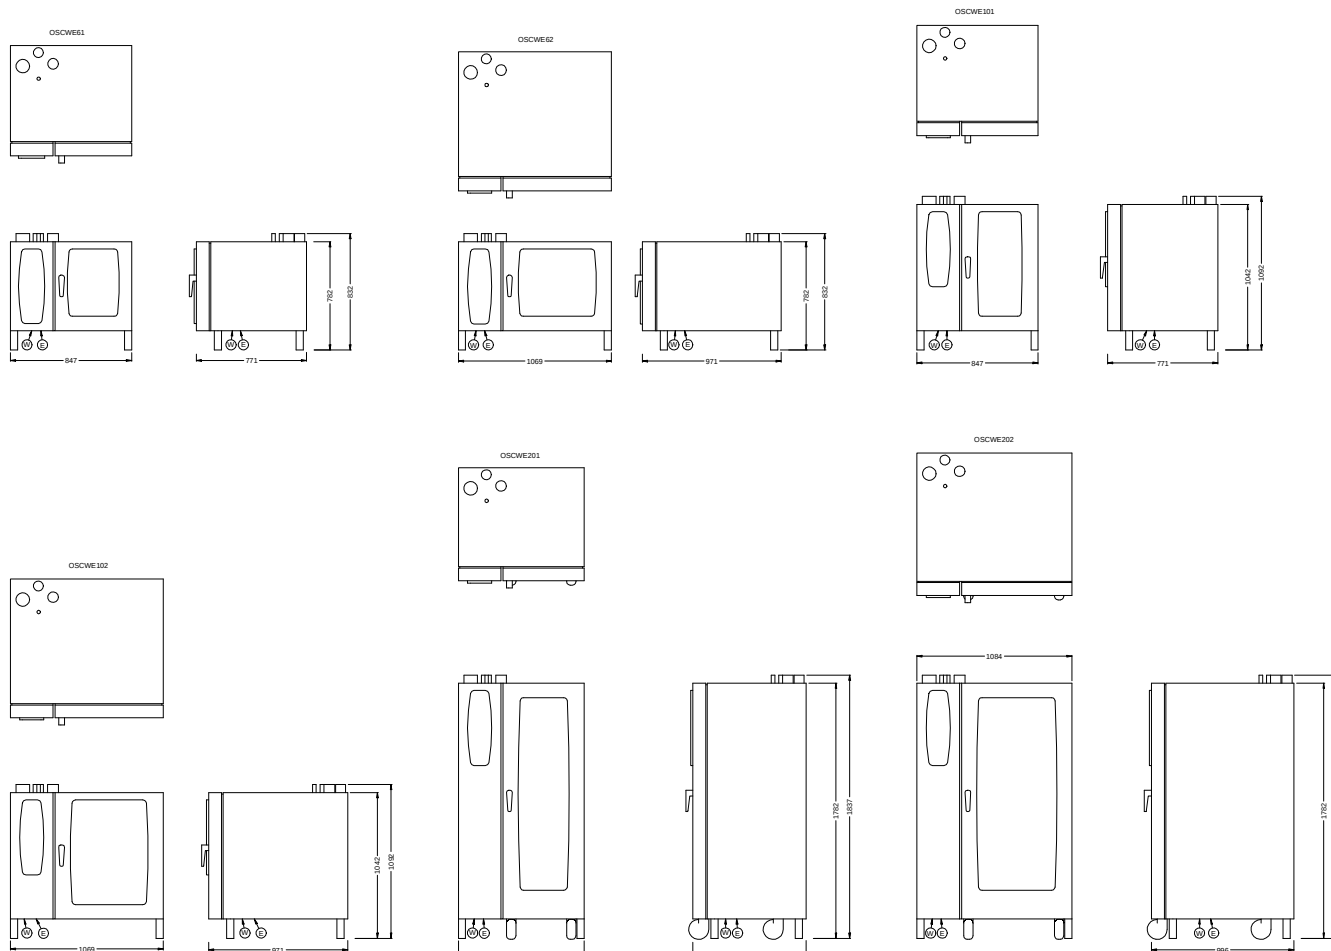

Lincat Limited, Whisby Road,
Lincoln LN6 3QZ,
United Kingdom

UK Sales Tel: 01522 875500 UK Spares Tel: 01522 875510 UK General Tel: 01522 875555
UK Fax: 01522 875530 International Sales Tel: +44 1522 503250 International Fax: +44 1522 875530
Website: www.lincat.co.uk UK Sales e-mail: sales@lincat.co.uk International Sales e-mail: export@lincat.co.uk



Document ref:
OSCWELEC
Issue date: May-14