

Opus 700 Fryers

Key Features

- Type: Electric
- Hinged elements with safety interlock
- Drainage tap in cabinet
- Thermostatic temperature control (130 – 190°C)
- Supplied with baskets, lids and batter plates
- Fail-safe top temperature cut-out
- Supplied on castors



OE7113

Construction

- Body: stainless steel grade 430
- Hob top: stainless steel grade 430
- Tank: steel
- Baskets: nickel plated

Available Options


- Height adjustable legs
- Choice of widths
- Single and twin tank models

Available Accessories

- BA83 – half size basket

Specifications

Model	OE7112	OE7105	OE7114	OE7108	OE7113
External height (mm)	1050 - 1105				
External width (mm)	300	400	400	600	600
External depth (mm)	760				
Height to hob	900 - 950				
No. of tanks	1	2	1	1	2
No. of baskets	1	2	2	2	2
Oil capacity (litres)	16	2 x 8	19	35	2 x 16
Net weight unpacked (kg)	54	58	58	69	81
Gross weight packed (kg)	64	68	68	85	96
Shipping volume (m ³)	0.459	0.459	0.459	0.714	0.714
Total electrical power rating (kW)	12.0	14.0	14.0	22.0	24.0
Electrical supply 1N~+E (one supply cable) 230V 50-60Hz Current Rating (A)	52.2	60.8	60.8	N/A	N/A
Electrical supply 1N~+E (two supply cables) 230V 50-60Hz Current Rating (A)	N/A	N/A	N/A	2 x 47.8	2 x 52.2
Electrical supply 3N~+E (one supply cable) 400V 50-60Hz Current Rating (A)	L1-17.5 L2-17.5 L3-17.5	L1-20.3 L2-20.3 L3-20.3	L1-20.3 L2-20.3 L3-20.3	L1-31.8 L2-31.8 L3-31.8	L1-34.8 L2-34.8 L3-34.8
Electrical supply 3N~+E (two supply cables) 400V 50-60Hz Current Rating (A)	N/A	N/A	N/A	2 x L1-15.9 2 x L2-15.9 2 x L3-15.9	2 x L1-17.4 2 x L2-17.4 2 x L3-17.4

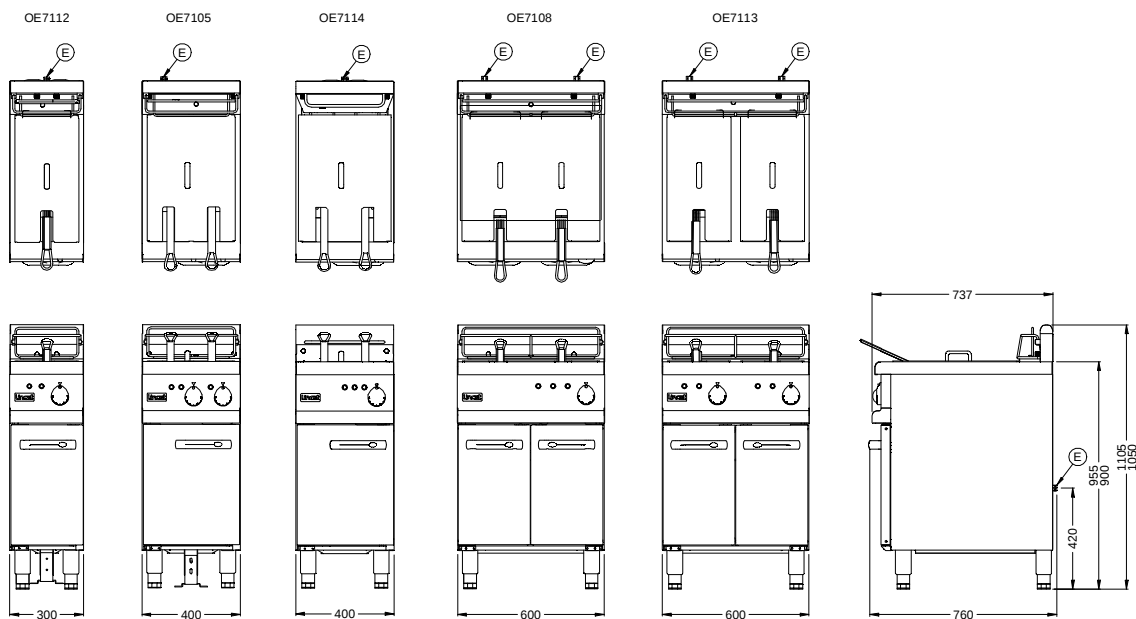

Lincat Limited, Whisby Road,
Lincoln LN6 3QZ,
United Kingdom

UK Sales Tel: 01522 875500 UK Spares Tel: 01522 875510 UK General Tel: 01522 875555
UK Fax: 01522 875530 International Sales Tel: +44 1522 503250 International Fax: +44 1522 875530
Website: www.lincat.co.uk UK Sales e-mail: sales@lincat.co.uk International Sales e-mail: export@lincat.co.uk



Document ref:
OPUSELCFRYERS
Issue date: Apr-11