

# MODEL: 0E8701



If you're looking for a pasta boiler, steamer and Bain Marie but don't have the space for all of these appliances, then you'll love the Opus 800 Electric Pasta Boiler, which can do all of these things. Whether you're cooking in a large pub or a restaurant, save valuable space with the flexible pasta boiler that's also a steamer and a Bain Marie. With direct connection to the water supply and waste, the boiler comes with a starch removal system to keep water fresh, as well as boil dry protection. Then there's the two position water setting, which allows for a fast fill or a trickle fill to maintain the water level while cooking.

Opus 800

### PRODUCT OPTIONS AND ACCESSORIES

- OA8924 BASKET-PASTA BOILER 143 x 288 x 230 DEEP
- OA8922 BASKET-PASTA BOILER 298 x 328 x 230 DEEP
- OA8928 GASTRONORM & LID
- OA8925 PASTA BOILER BASKET 1/6 SQUARE 143 x 163 x 230 DEEP

### **PRODUCT FEATURES**

- Flexible can be used as a pasta boiler, steamer or bain marie, saving valuable space
- Two position water setting: fast fill, or trickle fill for maintaining water level while cooking
- Direct connection to water supply and waste
- Starch removal system keeps water fresh
- Boil dry protection
- GN1/1 compatible







# LINCAT OPUS ELECTRIC FREE-STANDING PASTA COOKER - W 400 **MM - 6.0 KW**

**MODEL: 0E8701** 

WEIGHTS & DIMENSIONS	
Width	400 mil
Depth	800 mil
Height	1020 mil
Weight	58.4 kg

SHIPPING DETAILS	
Ship Width	85 cm
Ship Depth	45 cm
Ship Height	122 cm
Ship Weight	64.24 kg
Number of Shipment Parcels	1
Shipping Origin Zip Code	LN6 3QZ, UNITED KINGDOM
Quick Ship Product	No
Returnable Item	No

## **PRODUCT CERTIFICATIONS**



ENERGY SPECS	
Primary Energy Source Type	Electricity
Electrical Amps	Single Phase 26.1/Three Phase L1=13.0; L2=13.0; L3=N/A
Electrical Voltage	230/400 volts
Electrical Watts	6000
Electrical Phase	Single, Three
Kilowatts	6 kW

Number of Electrical Conductor Wires	1
Electrical Connection Type	Direct Hardwired
Electrical Plug Type	Hardwired
Number of Electrical Plugs	Not Applicable
Dedicated Circuit Required	Yes
Energy Saving	No

241
Mechanical
7.5kg pasta - penne [fresh] per hour
No
0

Number of Vats (batteries)	1
Overflow Prevention	Yes
Temperature Maximum	190°C
Temperature Minimum	130 °C
Water Fill	Automatic

## **BIDDING SPECIFICATIONS**

Bidding Specifications Not Available.

Lincat reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.


Document Auto-Generated January 23, 2024







**MODEL: 0E8701** 

## **TECHNICAL DRAWING**



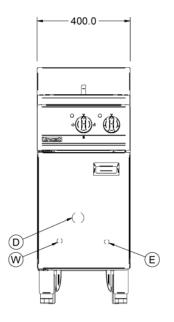

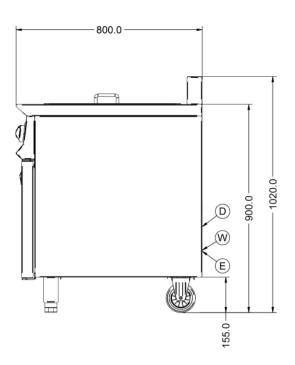

Lincat reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.

Document Auto-Generated January 23, 2024

