





OG8401/N - Lincat Opus 800 Natural Gas Countertop Chargrill - W 600 mm - 13.8 kW Embrace the unique power and versatility of the Opus 800 Three-Zone Gas Chargrill, which provides three heat zones which are capable of maintaining different temperatures on the same surface, allowing you to cook chicken fillets only inches away from steaks.

- Three heat zones which are capable of maintaining different temperatures on the same surface, allowing you to cook chicken fillets only inches away from steaks. Individual zones can be turned off during quiet periods.
- Highly powerful infra-red burners respond quicker and heat faster than standard burners allowing you to increase your output and achieve energy savings
- Heavy-duty cast iron branding grids with reversible design, for uninterrupted cooking and self cleaning at maximum power

- Flame failure protection
- Heavy duty radiant caps protect burners

Summary		Power and Performance	
Brand	Lincat	BTU per Hour	47,086
Range	Opus 800	Total Power kW	13.8
Power Type	Gas	Cooking Area (Width x Depth) mm	500 x 620
Gas Type	Natural Gas	Temperature Control	Mechanical
Unit Type	Counter-top		
Available in UK Only	No		
UK Warranty	2 Years Parts and Labour Warranty		
Export Warranty	Contact your local dealer		
GTIN	5056105102816		
Key Specifications		Capacity	

Key Specifications		Capacity	Capacity	
Number of Heat Zones	3	Product Output per Hour	78 x 225g[8oz]steaks[chilled]	
Weights and Dimensions		Supply Connections		
Unit Height (External) mm	653	Requires Installation	Yes	
Unit Width (External) mm	600	Requires Electrical Supply	No	
Unit Depth (External) mm	806	Gas Connection BSP	1/2"	
Net Weight Kg	80.5	Gas Consumption at full rate Natural m³ per Hour	1.24	
		Gas Pressure Natural mbar	20	
		Total heat input at full rate Natural kW	13.8	
		Total heat input at full rate Natural BTU per hour	47,087	

## Shipping

Packed Weight Kg	88.55
Packed Height cm	79
Packed Width cm	70
Packed Depth cm	85





## **Available Accessories**

CH01 Caterflex Hose 1/2" - 1 Metre - for use with units up to 66,000 BTU


CH02 Caterflex Hose 1/2" - 1.5 Metre - for use with units up to 56,000 BTU


OA8950 Lincat Opus 800 Free-standing Floor Stand with Legs - for units W 600 mm


OA8950/C Lincat Opus 800 Free-standing Floor Stand with Castors - for units W 600 mm

RCO3M RADIANT COVER - OPUS 800 - UNDER DEVELOPMENT

## **Technical Picture**





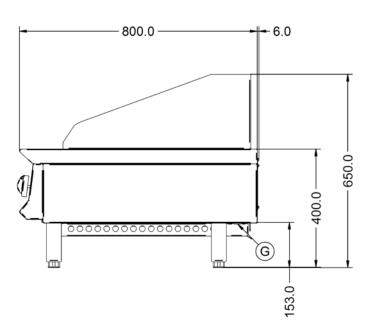







**Lincat Limited** 

Whisby Road,

Lincoln, LN6 3QZ,

United Kingdom

**Company No:** 2175448

A member company of

**Customer Care** 

**Tel:** +44 1522 875500

Email: care@lincat.co.uk

**Export Customers** 

**Tel:** +44 1522 875536

Email: export@lincat.co.uk

**Opening Hours** 

Monday - Friday:

8.30am - 5pm



Product Code: 0G8401/N Page Number: 3 Print Date: 07/09/2023