

MODELS: RIC1P RIC1PTH RIC1PBT GN 2/1 roll in.



RIC1P

Strengths

- ✓ **New line of cabinets roll-in improved in design, robustness and maintaining the same capacity and high standards of quality and reliability.**
- ✓ **Improvement of the energy classification, due to optimized circulation of the air for improved temperature uniformity in the interior.**
- ✓ **New design of doors with hinges for automatic return and permanent pressure during closing. The automatic return is free when the opening exceeds 95°. They include triple-chamber flat door gasket easily removable.**
- ✓ **The new digital control easy and intuitive-touch screen IP65 protection has a greater precision in the control of the temperature.**
- ✓ **All condenser units are tested 100%, in helium chambers to refrigerant leak detections.**
- ✓ **Infrico is AENOR audited and certified by internationally recognized firm. ISO 9001:2015 (Quality); ISO 14001:2015 (Environmental); OSHAS 18001:2007 (Prevention and Worker Safety). Audited and Certified by INTERTEK for compliance with UL 471 and NSF 7.**

Revision: 01 Fecha: 06/08/2018 RIC1P, RIC1PTH, RIC1PBT, RIC1PHT_FT_Es_0.1

MODELS	Dimensions (mm)			Nº Doors	Shelves	Cabinet volume (L)	Gross volume (L)	Temp. regime (°C)	Ref.	Gas charge (gr.)	Net weight (Kg.)
	Length	Depth	Height place								
RIC1P	940	1075	2360	1	-	1281	2385	0°C/+8°C	R134a	400	220
RIC1PTH	940	1075	2360	2	-	1281	2385	0°C/+8°C	R134a	400	220
RIC1PBT	940	1075	2360	1	-	1281	2385	910	-18°C	R452A	540

WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE



Infrico
 Ctra. de Aguilar A-318 por Moriles
 km. 15,5 - A-3132
 14900 Lucena (Córdoba)
 Spain

www.infrico.com
info@infrico.com
 Tel. 00 34 957 51 03 03
 Fax. 00 34 957 51 03 04

APPROVALS: _____ AVAILABLE AT: _____



MODELS: RIC1P RIC1PTH RIC1PBT GN 2/1 roll in.

STANDARD CHARACTERISTICS

➤ **Exterior and interior**

- Stainless Steel AISI 304 18/10,
- Constructed with removable panel that facilitates its installation in enclosures with narrow doors,
- 20 mm thick insulated bottom with ramp.

➤ **Doors**

- Doors with new handle easy to use,
- Pivoting hinge with opening lock and possibility of height adjustment,
- Stamped door with three-chamber easy-to-replace door gasket,
- Door clear 700x1850 mm,

➤ **Insulation**

- Insulation by free CFC's polyurethane of thickness 80 mm, foam high-pressure injected with density 40 Kg/m³.
- Zero ODP and Low GWP.


➤ **Capacity**

- Each door admits (1) a GN 2/1 trolley or (1) a GN 1/1 trolley,

➤ **Refrigeration**

- Temperature and defrost regulated by a digital touch controller IP 65.
- End defrost temperature control,
- Cooling System Monoblock,
- Ventilated Condensation System,
- Forced Evaporation System,
- Evaporators treated with anti-corrosion polyester Epoxy,
- Climatic class 4 (RIC1PBT, 30°C, 55%RH).
- Climatic class 5 (RIC1P, RIC1PTH, 40°C, 40%RH).

➤ **Electrical**

- Electrical connection: 230 V / 1 ph / 50Hz 

OPTIONAL

- Electric connection 220 V / 1 ph / 60 Hz,
- Electric connection 115 V / 1 ph / 60 Hz.

MODELS	Dimensions palletizing (mm)			Pallet weight (Kg.)	Comp. (HP)	Power (W)	Cooling power (W at -10/-30°C)	Consumption (kWh/24h)	Intens. (A)	Container 20'/40'/40'HC	Trailer
	Length	Depth	Height place								
RIC1P	2140	1110	1670	240	1/2	499	494	3,55	3,35	10 / 20 / 20	24
RIC1PTH	2140	1110	1670	240	1/2	497	464	3,55	3,35	10 / 20 / 20	24
RIC1PBT	2140	1110	1670	255	1 1/4	2,5	739	9,67	7,90	10 / 20 / 20	24

WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE



Infrico
 Ctra. de Aguilar A-318 por Moriles
 km. 15,5 - A-3132
 14900 Lucena (Córdoba)
 Spain

www.infrico.com
info@infrico.com
 Tel. 00 34 957 51 03 03
 Fax. 00 34 957 51 03 04


APPROVALS: AVAILABLE AT:



MODELS: RIC1P RIC1PTH RIC1PBT GN 2/1 roll in.


GENERAL VIEW

FRONT VIEW

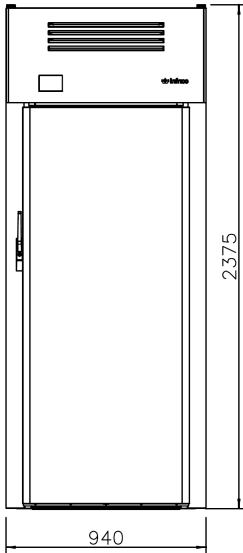


RIC 1 P / RIC 1 PTH / RIC 1 PBT


TOP VIEW



SIDE VIEW

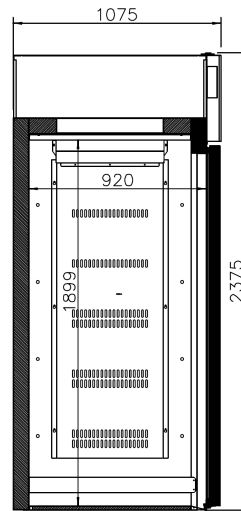


RIC 1 P / RIC 1 PBT

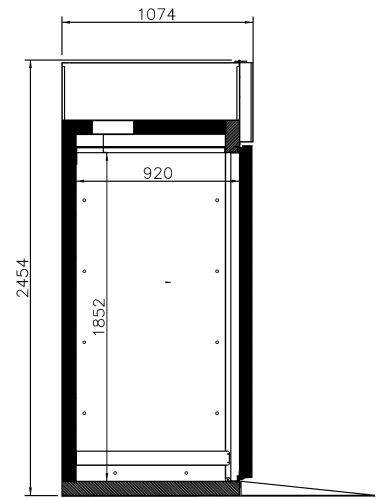

RIC 1 PTH

CONNECTIONS

MODELS	A (mm)	B (mm)	C (mm)	D (mm)
RIC1P/RIC1PBT	940	120	2035	2375
RIC1PTH	940	120	2066	2375

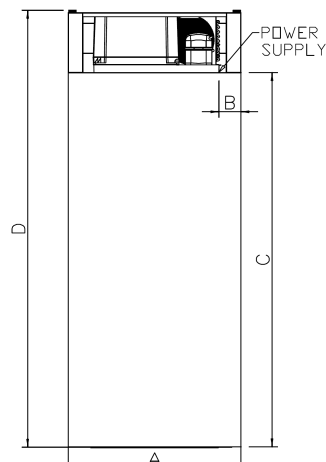

RIC 1 P / RIC 1 PTH / RIC 1 PBT

WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE



Infrico
 Ctra. de Aguilar A-318 por Moriles
 km. 15,5 - A-3132
 14900 Lucena (Córdoba)
 Spain

www.infrico.com
info@infrico.com
 Tel. 00 34 957 51 03 03
 Fax. 00 34 957 51 03 04

APPROVALS: _____ AVAILABLE AT: _____

