DISHWASHER UX-120BCDV 230/50/1

Rack size 500x500mm and door clearance 430 mm

P/N 1303377



SALES DESCRIPTION

Sani-Control: guaranteed disinfection

Exclusive Hydroblade™ washing arms: maximum effectiveness.

3-stage filtering system.

Steam condenser: environmental improvement and energy efficiency.

Sani-Control guarantee

- GUARANTEED DISINFECTION in compliance with standard DIN
- THERMAL LOCK function: Ensures that rinsing will be carried out at the ideal temperature to disinfect the dishes.
- ✓ CONSTANT HIGH TEMPERATURE RINSE system for optimal disin-
- √ The PRESSURE PUMP quarantees effective high-pressure rinsing
- √ WRAS certified.

Steam condenser

- ✓ Reduces the steam released into the installation by 75%.
- √ Factory-integrated condenser module, no installation required.

New recessed bodywork

- ✓ Ergonomic design with rounded corners to prevent the accumulation of dirt and facilitate cleaning.
- √ Compact tank volume (50% water saving compared to the previous)

Hydroblade™ washing arms

- Redesigned nozzles for greater washing performance.
- √ The "monoblock" design delivers durability and resistance to impacts.
- 30% savings in water consumption during rinsing compared to the previous range.

3-stage filter system: surface, tank and extraction

Keeps the washing water in optimal conditions to maintain constant





washing performance.

Designed to last

- √ "Flow" opening mechanism: allows the hood to be raised with less
- √ High load capacity 43 cm: suitable for GN 1/1 and Euronorm
- Stainless steel surface filters for greater stability and resistance during intensive use

Premium warewashing

- Soft start: progressive start-up of the washing pump to protect fragile items.
- Colour LCD Display: intuitive communication of the machine status by means of messages, colour codes and icons.
- Dedicated cycles: selection of the ideal washing programme using icons.
- Adaptable: allows the main parameters of the machine to be adjusted to the needs of each user.
- √ TEMPERATURE DISPLAY
- Wash Plus+ function: increases the intensity of the wash cycle for greater cleaning performance
- Control panel with IP65 humidity protection.

You will never WASH ALONE

- √ Tech-Services: our team of technicians will help you so that your machine is always ready for use.
- Design Services: tell us what your needs are and we will advise you.
- √ 60 years of experience and know-how at your disposal.

NCLUDES

- Detergent Dispenser.
- Drainage pump with level sensor. Proactive tank water
- Automatic resin regeneration water softener with salt
- detector.
- √ Rinse aid pump.
- 1 glasses basket.
- 1 mixed basket (plates).
- 1 cutlery basket.

OPTIONAL

ACCESSORIES

- □ Tables for dishwashers P/X/S (pass-through model)
- Manual water softeners
- Automatic water softeners
- ☐ 500 x 500 mm. baskets
- ☐ Inserts & supplements
- Central sorting tables
- Double connection central
- sorting table
- Prewashing tables for pass-through and rack conveyor dishwashers
- Connecting tables for Pass-Through dishwashers and rack conveyors
- ☐ Reverse Osmosis device OS-140P

SPECIFICATIONS

Basket dimensions: 500 mm x 500 mm Maximum glass height: 430 mm

Cycle duration: 60/90/100/150/210 " Production baskets/hour: 60/40/36/24/17

Boiler capacity: 12 I Wash tank capacity: 25 I

Consumption and savings

- √ Water consumption/cycle: 2.8 I
- ✓ Automatic saving mode in: 25 °

updated 17/02/2022 product sheet



DISHWASHER UX-120BCDV 230/50/1

Rack size 500x500mm and door clearance 430 mm

P/N 1303377

✓ Automatic switch-off: 120 '

Loading

Pump: 1000 W / 1.3 Hp

Tank: 7500 W Boiler: 9000 W

Total loading: 8500 W

Electrical supply: 230 V / 50 Hz / 1 ~ (38.6 A)


External dimensions (WxDxH)

- ✓ Width:650 mm (: -- mm)
- √ Depth: 755 mm (: -- mm)

✓ Height: 2035 mm / 2035 mm

Net weight: 138 Kg Wash temperature: -- °C Rinse temperature: 87 °C Noise level (1m.): <70 dB(A)

Crated dimensions 760 x 860 x 2050 mm Gross weight: 149 Kg

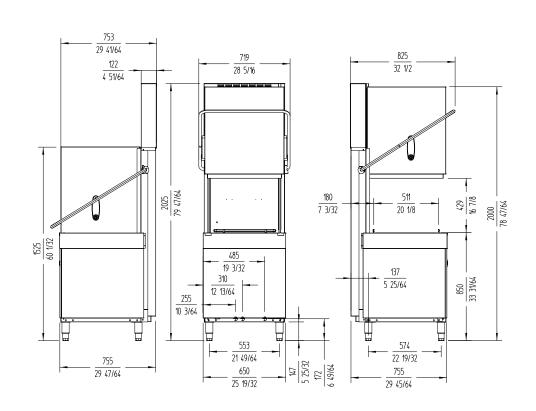



www.sammic.co.uk

Food Service Equipment Manufacturer Unit 2, Trevanth Road Troon Industrial Park LE4 9LS - Leicester

uksales@sammic.com Tel.: +44 0116 246 1900



Project	Date
Item	Qty

Approved