




GLASSWASHER S-41

400x400mm racks. Max. loading height: 280mm



WARE WASHING
COMMERCIAL GLASSWASHERS

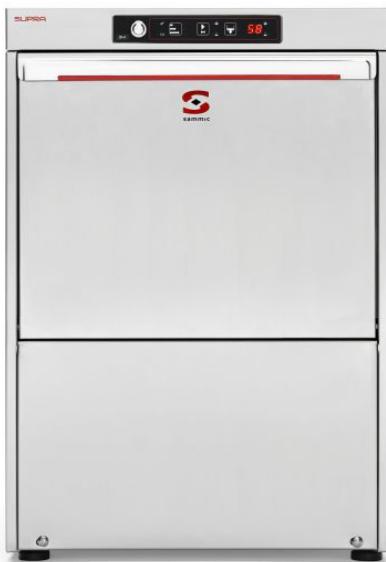

SALES DESCRIPTION

Top + bottom wash arms. 3 wash cycles. Cold rinse facility. Option of built-in water softener.

- ✓ Best performance.
- ✓ Optimal washing results.
- ✓ Sturdy and reliable.
- ✓ Thermal and acoustic insulation.
- ✓ Stainless steel, sturdy and resistant washing arms. Don't get damaged because of chemical corrosion.
- ✓ Full optional list.

FEATURES AND BENEFITS

- ✓ Intuitive use.
- ✓ Catering grade stainless steel construction.
- ✓ Double skinned construction with magnetic micro-switch and high-efficiency seal, ensuring thermal and acoustic insulation.
- ✓ Completely rounded, stainless steel wire rack support and guide.
- ✓ Electronic control panel with anti-moisture seal.
- ✓ Highly efficient stainless steel dispersers ensure optimum water distribution for enhanced washing results.
- ✓ Rinsing dispersers offer clean design. Assembly without screws.
- ✓ Double filter system provides effective wash pump protection.
- ✓ Independent rinse boiler complete with adjustable thermostat and thermal lock option.
- ✓ Easily removable dispersers and filters for cleaning and maintenance. No tools needed.
- ✓ Designed for quick and easy maintenance. Fast access to components for on-site maintenance.
- ✓ 100% tested.

INCLUDES

✓ Rinse aid pump.	✓ 1 mixed basket.
✓ Detergent dosing equipment.	✓ 1 small cutlery basket.
✓ 1 open basket.	

ACCESSORIES

<input type="checkbox"/> Stands for glass- and dishwashers	similar
<input type="checkbox"/> Dosing equipments	<input type="checkbox"/> High Feet Kit
<input type="checkbox"/> Manual water softeners	
<input type="checkbox"/> Automatic water softeners	
<input type="checkbox"/> 400X400 mm. baskets	
<input type="checkbox"/> Inserts, supplements &	



www.sammic.co.uk

Food Service Equipment Manufacturer
Unit 2, Trevanth Road
Troon Industrial Park
LE4 9LS - Leicester
uksales@sammic.com
Tel.: +44 0116 246 1900



Project

Date

Item

Qty

Approved



GLASSWASHER S-41

400x400mm racks. Max. loading height: 280mm



SPECIFICATIONS

Basket dimensions: 400 mm x 400 mm

Maximum glass height: 280 mm

Cycle duration: 90 " / 120 " / 150 "

Production baskets/hour: 40 / 30 / 24

Water consumption/cycle: 2.2 l

Loading

✓ Pump: 240 W / 0.33 Hp

✓ Tank: 1500 W

✓ Boiler: 2500 W

✓ Total loading: 2740 W

External dimensions (WxDxH)

✓ Width: 490 mm

✓ Depth: 530 mm


✓ Height: 710 mm

Net weight: 44 Kg

Noise level (1m.): <70 dB(A)

Crated dimensions

525 x 615 x 820 mm

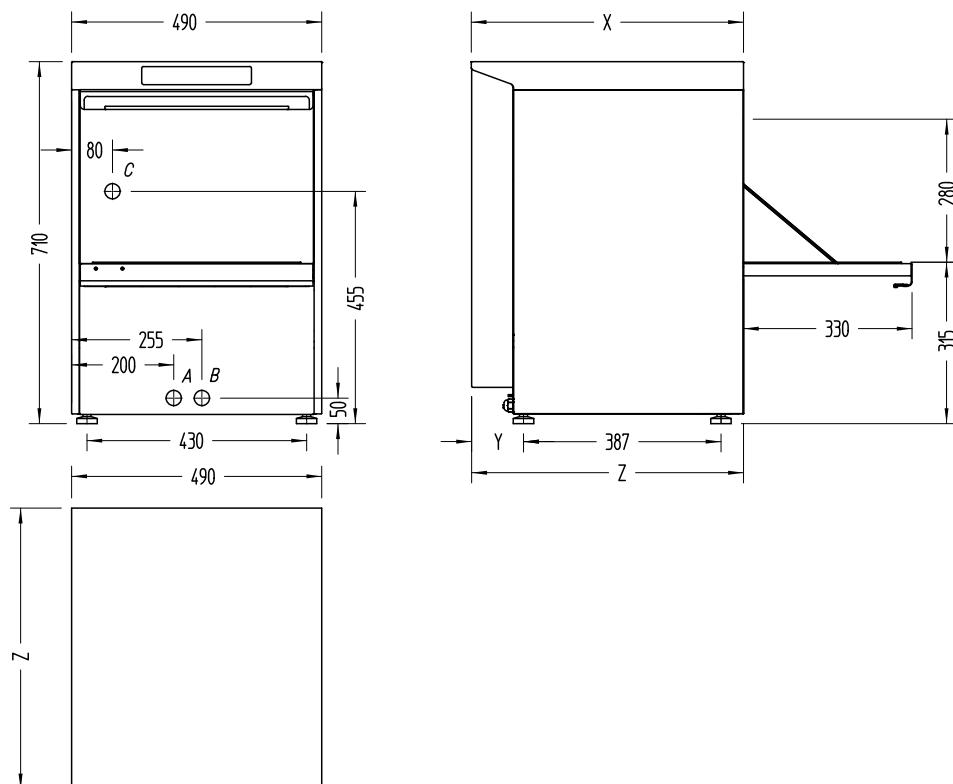

AVAILABLE MODELS

1302042 Glasswasher S-41 230/50/1 DD

1302046 Glasswasher S-41B 230/50/1 DD (with drain pump)

1302050 Glasswasher S-41D 230/50/1 DD (built-in water softener)

1302054 Glasswasher S-41BD 230/50/1 DD (with drain pump and built-in water softener)

* Ask for special versions availability



www.sammic.co.uk

Food Service Equipment Manufacturer
Unit 2, Trevanth Road
Troon Industrial Park
LE4 9LS - Leicester
uksales@sammic.com
Tel.: +44 0116 246 1900



Project

Date

Item

Qty

Approved