

SALES DESCRIPTION

Commercial multi-phase, multi-power dishwasher with 3 wash cycles, wash and rinse temperature display and thermal cycle delay option.

- ✓ Best performance.
- ✓ Optimal washing results.
- ✓ Sturdy and reliable.
- ✓ Stainless steel, sturdy and resistant washing arms. Don't get damaged because of chemical corrosion.
- ✓ Full optional list.

FEATURES AND BENEFITS

X-50 dishwasher is equipped with a high quality electronic panel complete with **wash and rinse temperature display**. Easy to use, X-50 is a **multi-phase dishwasher**:

- ✓ **230V / 50Hz / 1~ (standard)**
- ✓ **400V / 50Hz / 3N~**
- ✓ **230V / 50Hz / 3~**
- ✓ For washing glasses, cups, cutlery and small plates.
- ✓ Washing with double system of rotating dispersers (top and bottom).
- ✓ 3 wash cycles.
- ✓ Manufactured from catering grade AISI 304 2B stainless steel and incorporating top quality components.
- ✓ Double skinned door with high efficiency seal, ensuring thermal and acoustic insulation. Magnetic door micro-switch.
- ✓ Easy to use electronic control panel with anti-moisture seal and wash & rinse tank temperature displays.
- ✓ Removable stainless steel rack holders ensure even distribution of wash water without dead zones. Precision positioned water jets guarantee optimum washing result for even the most stubbornly stained glasses. Easy to assemble, boltless rinse spray arms.
- ✓ A double filter system provides effective wash pump protection that is easily removed (for maintenance and cleaning) and replaced, without tools.
- ✓ Inside of the machine with rounded finished: absence of angles avoiding the accumulation of dirt.
- ✓ Completely rounded, stainless steel wire rack support and guide.
- ✓ Automatic detergent and rinse aid dosing equipment.
- ✓ Adjustable washing tank and boiler temperature and security in the boiler.
- ✓ Rinse boiler temperature adjustment and a thermal cycle delay option, guaranteeing a minimum final rinse temperature of 85°C for each and every rinse cycle.
- ✓ The dual voltage option facilitates connection to single or 3 phase supply within the same appliance.
- ✓ Sammic ware washers are designed for easy and fast on-site maintenance.
- ✓ 100% tested.

INCLUDES



www.sammic.co.uk

Food Service Equipment Manufacturer
Unit 2, Trevanth Road
Troon Industrial Park
LE4 9LS - Leicester
uksales@sammic.com
Tel.: +44 0116 246 1900



Project	Date
Item	Qty
Approved	



DISHWASHER X-50

Multi-phase dishwasher. 500x500mm. racks. Max. loading height: 330mm.



SPECIFICATIONS

Basket dimensions: 500 mm x 500 mm

Maximum glass height: 330 mm

Cycle duration: 120 " / 150 " / 210 "

Production baskets/hour: 30 / 24 / 17

Wash temperature: 0 °C - 65 °C

Rinse temperature: 0 °C - 90 °C

✓ Boiler capacity: 10 l

✓ Wash tank capacity: 26 l

✓ Water consumption/cycle: 2.9 l

Loading

✓ Pump: 370 W / 0.5 Hp

✓ Tank: 2500 W

✓ Boiler: 3000/4500 W

✓ Total loading: 3370/4870 W

External dimensions (WxDxH)

✓ Width: 600 mm

✓ Depth: 630 mm

✓ Height: 835 mm


✓

Net weight: 63 Kg

Noise level (1m.): <70 dB(A)

Crated dimensions

640 x 695 x 960 mm

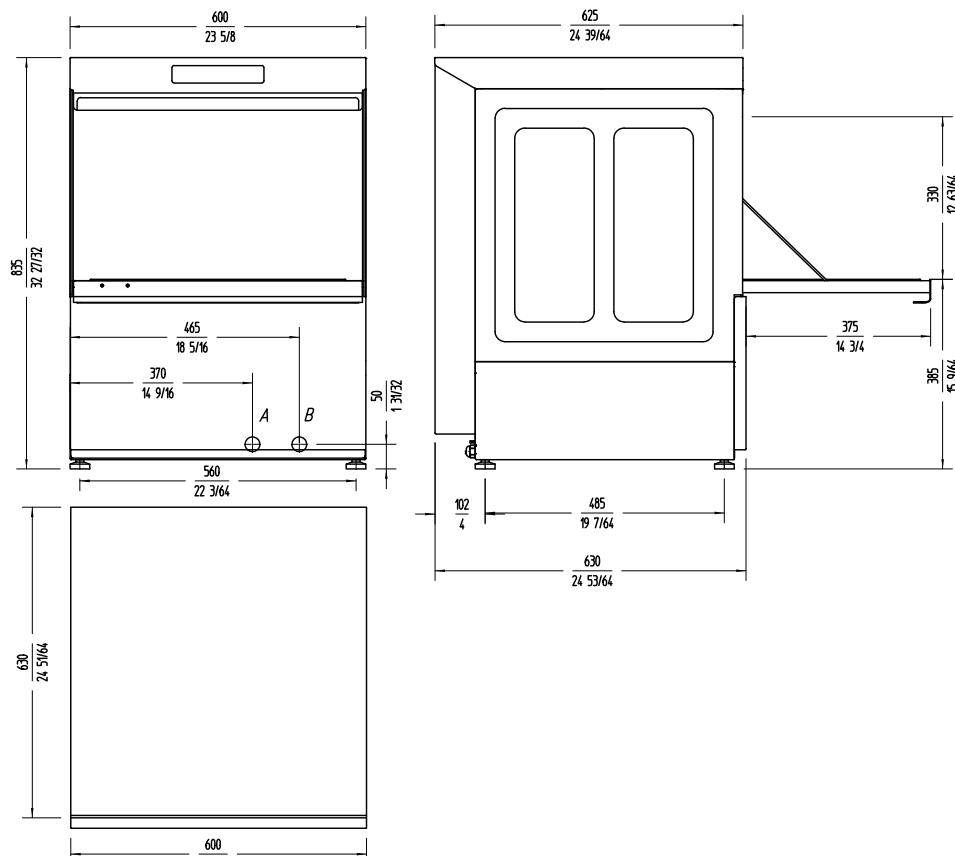

AVAILABLE MODELS

1302102 Dishwasher X-50 230/50/1 DD

1302103 Dishwasher X-50 220/60/1 DD

1302106 Dishwasher X-50B 230/50/1 DD (with drain pump)

1302107 Dishwasher X-50B 220/60/1 DD (with drain pump)

1302110 Dishwasher X-50D 230/50/1 DD (built-in water softener)

1302111 Dishwasher X-50D 220/60/1 DD (built-in water softener)

1302114 Dishwasher X-50BD 230/50/1 DD (built-in water softener and drain pump)

1302115 Dishwasher X-50BD 220/60/1 DD (built-in water softener and drain pump)

* Ask for special versions availability

WARE WASHING
COMMERCIAL DISHWASHERS

product sheet
updated 23/07/2018



www.sammic.co.uk

Food Service Equipment Manufacturer
Unit 2, Trevanth Road
Troon Industrial Park
LE4 9LS - Leicester
uksales@sammic.com
Tel.: +44 0116 246 1900



Project	Date
Item	Qty
Approved	

product sheet
updated 23/07/2018