



# DISHWASHER UX-50SBCD 230/50/1 DD

Rack size 500x500mm and door clearance 380 mm. Multi-power version.



1303290



WARE WASHING  
COMMERCIAL DISHWASHERS

## SALES DESCRIPTION

Sani-Control: guaranteed disinfection.  
Embedded bodywork and easy-grip door: hygienic and ergonomic  
Exclusive Hydroblade™ washing arms: maximum effectiveness.  
3-stage filtering system.  
Double-walled body (partial).  
Multi-power model. Default boiler loading: 2000W.

### Multi-phase dishwasher:

- ✓ 230V / 50Hz / 1~ (standard)
- ✓ 400V / 50Hz / 3N~
- ✓ 230V / 50Hz / 3~

### Sani-Control guarantee

- ✓ GUARANTEED DISINFECTION in compliance with standard DIN 10534.
- ✓ THERMAL LOCK function: Ensures that rinsing will be carried out at the ideal temperature to disinfect the dishes.

### New recessed bodywork

- ✓ Ergonomic design with rounded corners to prevent the accumulation of dirt and facilitate cleaning.
- ✓ Compact tank volume (50% water saving compared to the previous range).
- ✓ Embedded basket guides



### Hydroblade™ washing arms

- ✓ Redesigned nozzles for greater washing performance.
- ✓ The “monoblock” design delivers durability and resistance to impacts.
- ✓ 30% savings in water consumption during rinsing compared to the previous range.

### 3-stage filter system: surface, tank and extraction

- ✓ Keeps the washing water in optimal conditions to maintain constant washing performance.
- ✓ The surface filters feature an “easy-on” design and can be quickly removed without having to disconnect the washing arms.

### “Easy grip” door: new design with integrated door handle

- ✓ The integration of the components provides greater resistance and robustness.
- ✓ Designed to have no corners or areas that are difficult to access: prevents deposits of dirt and facilitates cleaning.
- ✓ Its ergonomic handle provides a perfect grip, even with wet hands.
- ✓ Double-walled door with safety microswitch and high quality seal
- ✓ 38 cm loading capacity: high versatility for washing a wide range of items: dishes, Euronorm trays, GN 1/1 tubs and pizza plates diam 39

### Premium warewashing

- ✓ Ultra Xperience: high performance, without complications.
- ✓ Soft start: progressive start-up of the washing pump to protect fragile items.
- ✓ Colour LCD Display: intuitive communication of the machine status by means of messages, colour codes and icons.
- ✓ Dedicated cycles: selection of the ideal washing programme using icons.
- ✓ Adaptable: allows the main parameters of the machine to be adjusted to the needs of each user.
- ✓ TEMPERATURE DISPLAY
- ✓ Wash Plus+ function: increases the intensity of the wash cycle for greater cleaning performance
- ✓ Control panel with IP65 humidity protection.

### You will never WASH ALONE

- ✓ Tech-Services: our team of technicians will help you so that your machine is always ready for use.
- ✓ Design Services: tell us what your needs are and we will advise you.
- ✓ 60 years of experience and know-how at your disposal.

## INCLUDES

- ✓ Detergent Dispenser.
- ✓ Drainage pump with level sensor. Proactive tank water renewal.
- ✓ Rinse aid pump.
- ✓ 1 glasses basket.
- ✓ 1 mixed basket (plates).
- ✓ 1 small basket for cutlery.

## ACCESSORIES

- Stands for glass- and dishwashers
- Manual water softeners
- Automatic water softeners
- 500 x 500 mm. baskets
- Inserts & supplements
- High Feet Kit
- Reverse Osmosis device OS-140P



www.sammic.co.uk

Food Service Equipment Manufacturer

Unit 2, Trevanth Road  
Troon Industrial Park  
LE4 9LS - Leicester

uksales@sammic.com  
Tel.: +44 0116 246 1900



Project

Date

Item

Qty

Approved

product sheet  
updated 03/01/2022



# DISHWASHER UX-50BCD 230/50/1 DD

Rack size 500x500mm and door clearance 380 mm. Multi-power version.



1303290

## SPECIFICATIONS

Basket dimensions: 500 mm x 500 mm  
Maximum glass height: -- mm

Cycle duration: -- " / -- " / -- "  
Production baskets/hour: -- / -- / --

Wash temperature: -- °C -- °C  
Rinse temperature: -- °C -- °C

Boiler capacity: -- l  
Wash tank capacity: -- l

### Consumption and savings

Water consumption/cycle: -- l  
Automatic saving mode in: 25 '  
Automatic switch-off: 120 '

### Loading

Pump: -- W / -- Hp  
Tank: -- W


Boiler: -- W  
Total loading: 5750 W

Electrical supply: -- V / -- Hz / -- ~ (-- A)

### External dimensions (WxDxH)

- ✓ Width: -- mm
- ✓ Depth: -- mm
- ✓ Height: -- mm

Net weight: -- Kg  
Noise level (1m.): -- dB(A)

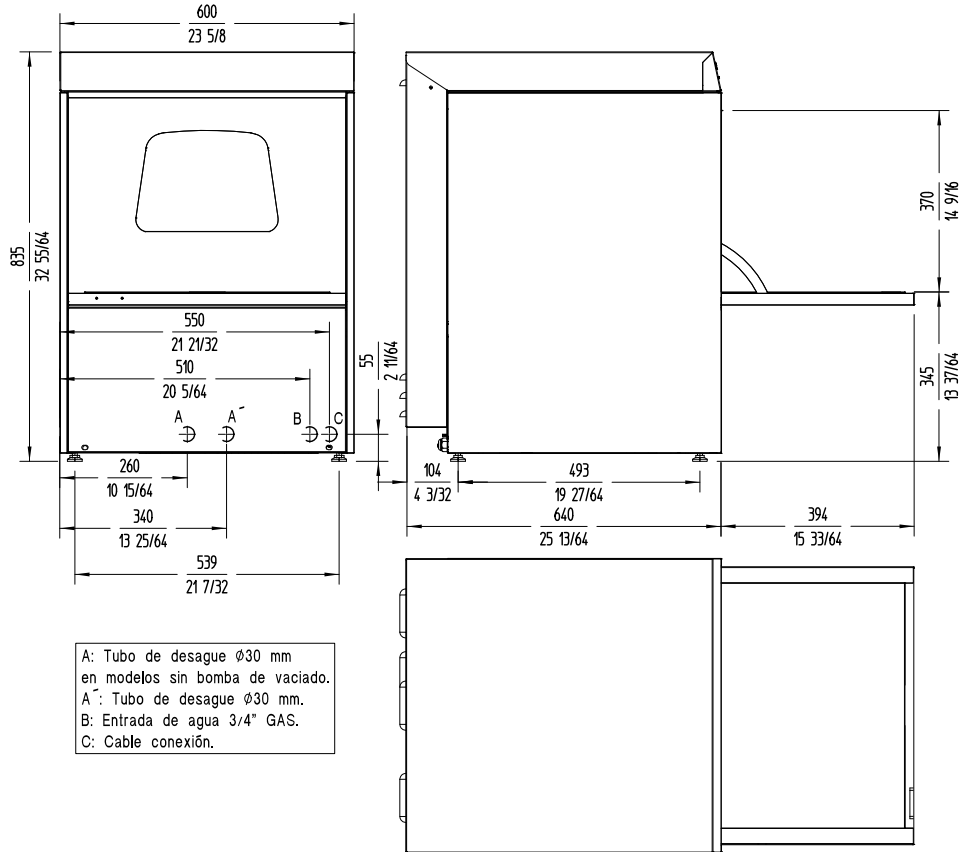

A: Tubo de desague  $\phi$ 30 mm en modelos sin bomba de vaciado.  
A': Tubo de desague  $\phi$ 30 mm.  
B: Entrada de agua 3/4" GAS.  
C: Cable conexión.

WARE WASHING  
COMMERCIAL DISHWASHERS



**www.sammic.co.uk**  
Food Service Equipment Manufacturer  
Unit 2, Trevanah Road  
Troon Industrial Park  
LE4 9LS - Leicester  
uksales@sammic.com  
Tel.: +44 0116 246 1900



Project	Date
Item	Qty
Approved	

product sheet  
updated 03/01/2022