




(SCW 14) Vers. "FP"



Stainless Steel Back Panel (standard)

Features

- Refrigerated drinking water fountain, USPH-S Regulations Compliant.
- Includes foot pedal activated projector.
- Water thermostat positioned behind the front panel for ease of reach.
- Delivers 50 liters per hour (13.2 gph) of 8°-12°C (46°-53°F) water (at 32°C-90°F ambient and 21°C-70°F inlet water temperatures).
- Cabinet and base finish, as well as all interior metal parts, in Stainless Steel.
- Easily removable front panel for routine maintenance & technical service access purposes.
- "Pierce Yourself" style incoming/outgoing utilities passages and internal connection turrets allow for maximum installation flexibility.
- High-efficiency water cooling tank and coil.
- Stainless Steel basin is designed to eliminate splashing and stagnant water.
- Waterways are lead-free.
- Operable on 220-240 volts, 50/60 Hz.
- Special 115/60/1 model available upon request.
- Cooling system uses R-134a refrigerant.
- Complies with ADA requirements when properly installed.
- Limited 2 years Warranty against manufacturing defects.

Technologies



		[°C]	[°F]	[l/h]	[gal/h]
SCW 14 FP		8 ÷ 12	46 ÷ 53	50	13.2
				[W/Hz/ph] 230/50-60/1	R 134 a

This product qualifies for the following listings:



Note:
Complete with foot pedal activated projector.
AISI 304 stainless steel.

2 Years Warranty

Subject to certain limitations and exclusions

Certified ISO 9001:2008

www.scotsman-ice.it
www.scotsman-ice.com

Models and specifications are subject to change without notice.


Scotsman®

Ice Systems

Pressure Water Cooler

SCW14 FP-EVO

USPH-S

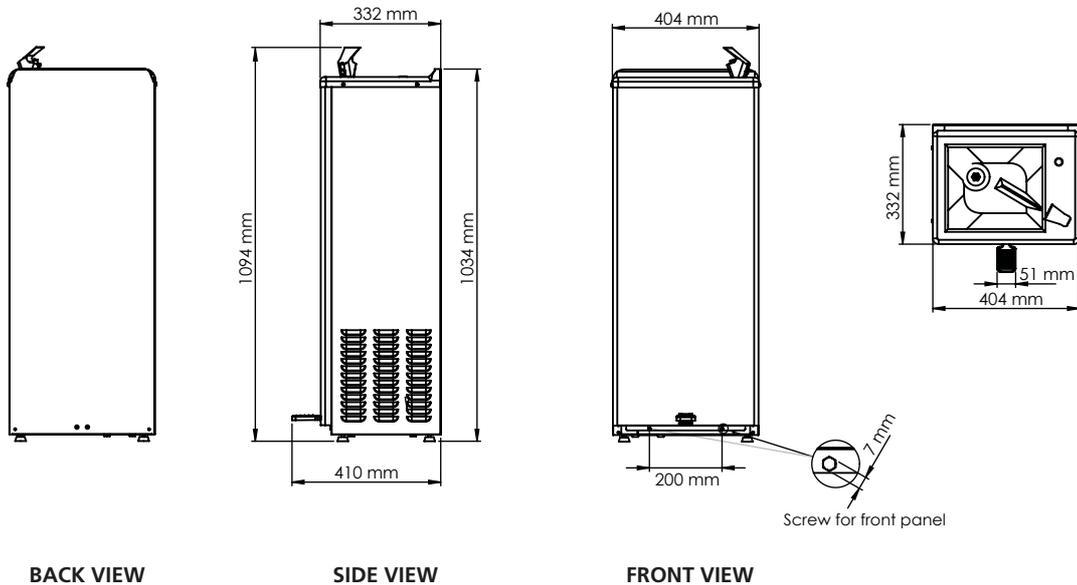

Can be used free standing or wall tight to avoid unsightly connections.
 Exclusive Projector Design: 2-stream mound-building projector and automatic stream regulator.
 Plumbing Connections: "Pierce yourself"
 Water supply 8 mm (3/7") IPS.
 Finish: stainless steel.

Minimum		Maximum
10°C (50°F)		40°C (104°F)
5°C (41°F)		35°C (95°F)
-10%		+10%
1 BAR 14 psi		5 BAR 70 psi

	+C° -C°	[Btu/h] [W]	[Ømm²]	[W]	FUSE	[kWh]	[kg] [lbs]	[kg] [lbs]
SCW14 FP		1208 353	3x1	250	10	0,25	33 73	36 79

IMPORTANT NOTICE:
 Models and specifications are subject to change without notice.
 This spec sheet is meant for commercial purpose only.
 For technical documentation please refer to our service manuals.

www.scotsman-ice.it
www.scotsman-ice.com

Scotsman®
 Ice Systems

Milano Madrid Chicago Dubai Singapore Shanghai Johannesburg