

SPH 120

Self Contained Ice Machine 124 kg



Item
Project
Quantity

		FEATURES • Resistant stainless steel exterior. • Direct trasmission • Low power and water consumption • Easy, front panel access to technical / service area of the machine. • Electronic control board with self diagnostic and malfunction alarms. • Continuous production • Reduced dimensions		
	CONDENSING SYSTEM Air cooled Water cooled			
	REFRIGERANT GAS R290			
	VOLTAGE V/HZ/PH 230\50\1			
CERTIFICATIONS   	OPERATING REQUIREMENTS			
			Minimum	Maximum
		Air temperature	10	43
		Water temperature	5	38
		Water pressure	1 bar (14 psi)	5 bar (70 psi)
		Electrical voltage	-10%	+10%
IMPORTANT NOTICE Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.		www.simag.it		

Self Contained Ice Machine 124 kg


SPH 120

Self Contained Ice Machine 124 kg

SIMAG

Item
Project
Quantity

Self Contained Ice Machine 124 kg

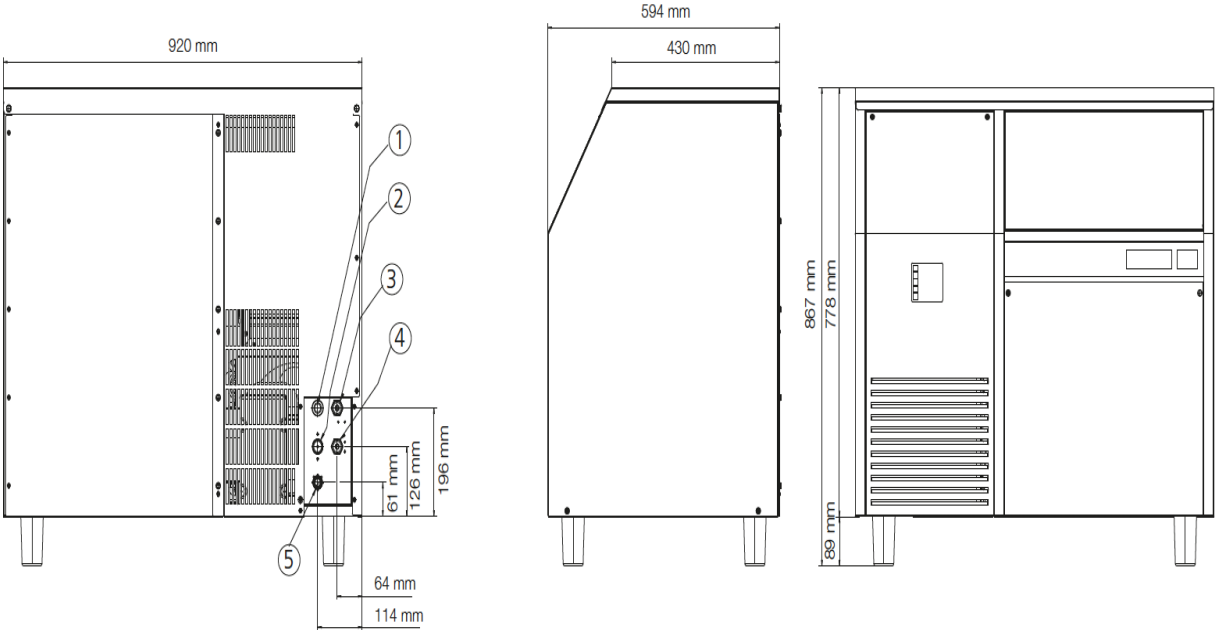

UNIT DATA			SHIPPING DATA			(*) Data refer to 32°C Amb. / 21°C Water temperature conditions						
Size (W x D x H)			Size (W x D x H)									
920 x 594 x 778 mm			960 x 650 x 980 mm									
Net weight			Gross weight									
67 kg			78kg									
			24 h ice production kg C Amb. / °C Water			Cap bin	Heat Rejection	Energy Consumption (*)	Water Usage (*)	instant power	circuit wires	Max. Fuse Size
Version	Voltage	Condensation	10°C/10°C	21°C/10°C	32°C/21°C	kg	kW	kWh/ 24h	l/h	W	No. x Ømm2	A
			kg	kg	kg							
SPH 120 AS	230\50\1	A	124	120	99	55	0,9	10	4	450	3 x 1,0	10
SPH 120 WS	230\50\1	W	124	120	99	55	0,9	10	4	450	3 x 1,0	10