



# RACK CONVEYOR DISHWASHER SRC-2200

85/126 baskets per hour (up to 2.200 plates/hour)



WARE WASHING  
RACK CONVEYOR DISHWASHERS



## SALES DESCRIPTION

Washing + rinsing.  
2 speed.

## FEATURES AND BENEFITS

- ✓ Fully stainless steel jacket.
- ✓ Inlet and outlet splash guards are standard.
- ✓ Stainless steel central rack feed system.
- ✓ Process cycles are divided by rubber curtains.
- ✓ Automatic cycle start.

### Economy

- ✓ Energy saving rinse supply switch.
- ✓ Pressure controller in the rinse section to limit consumption.
- ✓ Programmed automatic stops if there is no loading.
- ✓ Stop and freezing of timer when the limit switch actuates.

### Cleaning and maintenance

- ✓ Wide pivoting door allowing access for cleaning or inspection purpose.
- ✓ Detachable arms and dispersers for easier cleaning.
- ✓ Sloped removable stainless steel filters with independent removable basket.
- ✓ Easy boiler emptying by loosening a hose.
- ✓ Failures are easily detected thanks to the warning lights.
- ✓ Easy to repair without moving the machine.

### Washing

- ✓ Stainless steel wash arms and deep-drawn dispersers.
- ✓ Efficient and durable wash arm dispersers.
- ✓ Powerful, self-draining vertical wash pump.
- ✓ Easy to install detergent dispenser intake in washing tank.

### Rinsing

- ✓ Stainless steel rinse arms and powerful, stainless steel, deep-drawn dispersers.
- ✓ Automatic boiler filling with no failure risk for heating elements.
- ✓ Temperature control with high precision probes.
- ✓ Visualisation and adjustment of washing and rinsing temperatures in the digital display by pressing a button.
- ✓ Easy to install rinse aid dispenser intake in boiler.

## INCLUDES

- ✓ Inlet and outlet splash guards are standard.



**www.sammic.co.uk**  
 Food Service Equipment Manufacturer  
 Unit 2, Trevanah Road  
 Troon Industrial Park  
 LE4 9LS - Leicester  
 uksales@sammic.com  
 Tel.: +44 0116 246 1900



Project	Date
Item	Qty
Approved	

product sheet  
updated 06/03/2018



# RACK CONVEYOR DISHWASHER SRC-2200

85/126 baskets per hour (up to 2.200 plates/hour)



## SPECIFICATIONS

### Production

- ✓ Production baskets/hour: 85 / 126
- ✓ Production plates/hour: 1530 / 2200

### Wash

- ✓ Temperature: 55 °C - 65 °C
- ✓ Wash tank capacity: 100 l
- ✓ Pump: 3 Hp / 2250 W
- ✓ Wash heating element: 9000 W

### Rinse

- ✓ Temperature: 80 °C - 90 °C
- ✓ Water consumption: 300 l/h
- ✓ Rinse heating element: 18000 W
- ✓ Boiler capacity: -- l

### Drag

- ✓ Drag motor power: 0.25 Hp / 135 W

### Loading

- ✓ Central module total power : 28385 W

### External dimensions (WxDxH)

- ✓ Width: 1700 mm
- ✓ Depth: 829 mm
- ✓ Height: 1520 mm

**Net weight:** 250 Kg

**Water Intake:** 3/4 "



**Drain diameter:** 1 1/2 "

**Noise level (1m.):** 71 dB(A)

### Electrical supply:

- ✓ 400V / 50 Hz / 3N
- ✓ 220V / 60 Hz / 3
- ✓ 440V / 60 Hz / 3

**Please note: +3kW rinse heating element in models equipped with steam condenser.**

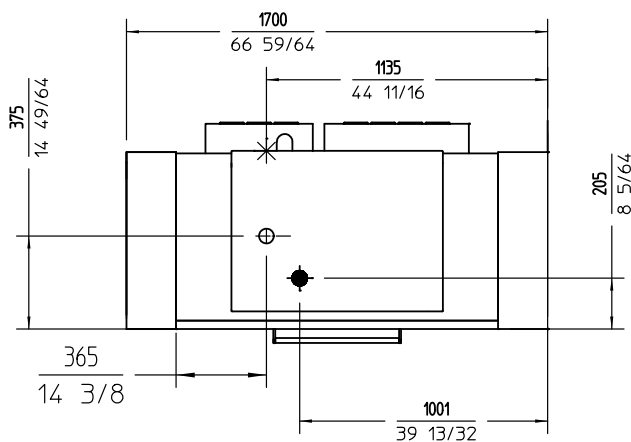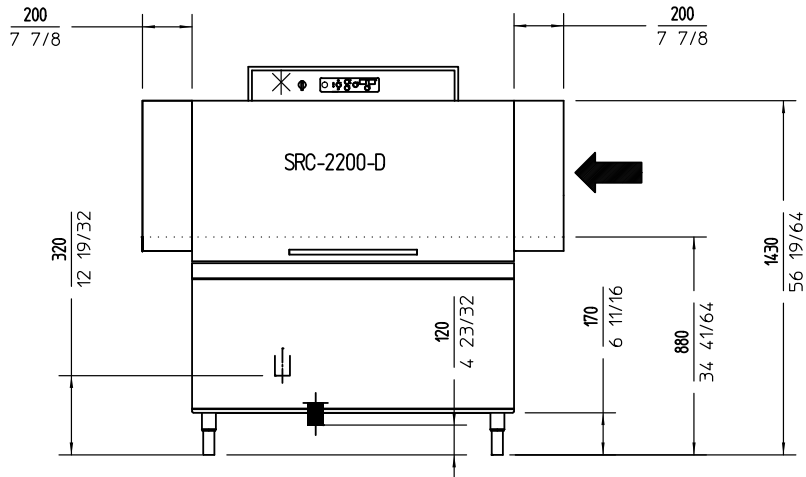

## AVAILABLE MODELS

1302500 Dishwasher SRC-2200D 400/50/3N (right hand entry)

1302513 Dishwasher SRC-2200I 400/50/3N (left hand entry)

\* Ask for special versions availability

## ACCESSORIES

- Drying units
- Manual water softeners
- Automatic water softeners
- 500 x 500 mm. baskets
- Inserts, supplements & similar
- Loading table for corner situation for rack conveyor dishwashers
- Central sorting tables
- Double connection central sorting table
- Single exit tables
- Roller conveyor and corner roller conveyor
- Machined curve
- CA Extraction hood
- EV Extraction hood with motor
- CV Extraction hood with steam condensation
- Connecting tables for Pass-Through dishwashers and rack conveyors
- Drying unit for corner situation

WARE WASHING  
RACK CONVEYOR DISHWASHERS



[www.sammic.co.uk](http://www.sammic.co.uk)

Food Service Equipment Manufacturer

Unit 2, Trevanah Road  
Troon Industrial Park  
LE4 9LS - Leicester

[uksales@sammic.com](mailto:uksales@sammic.com)  
Tel.: +44 0116 246 1900



Project

Date

Item

Qty

Approved

product sheet  
updated 06/03/2018