

TUC-48F-HC

 Undercounter Foodservice Freezer, 2 Solid Swing Doors



Dimensions		Build		Technical	
External Width (mm)	1229	Door Description	2 Solid Swing Doors	Temperature Range	-23°C
External Depth (mm)	766	Exterior Construction	Stainless steel front & countertop, aluminium sides & rear	Refrigerant	R290
External Height (mm)	839	Interior Construction	Clear coated aluminium, stainless steel base	Voltage/Frequency/Phase	220-240V/50Hz/1
Exclusions	Depth does not include 26 mm for rear bumpers.	Air Intake Position	Front	Amps	1.8
Net Volume (Litres)	278	Ventilation Position	Front	Watts	414
Gross Volume (Litres)	340	Clearance Required	Zero back and sides	Climate Class	4
Supplied Shelves	4	Cord Length (Meters)	2.13	Operating Statement	Regular Duty: This appliance is intended for use in ambient temperatures up to 30°C.
Shelf Size (L x D mm)	Two 547 x 514 + Two 547 x 349	Standard w/ Locks	Standard	Test Standard	EN 16825
Internal Net Height (mm)	630			EEC	D
Unpackaged Weight (kg)	114			Energy Efficiency Index	50.8
Packaged Weight (kg)	125			Defrost Type	Auto
Packaged Dimensions (W x D x H mm)	1296 x 839 x 1207			Energy Consumption (kWh/24h)	5.57
Supplied with	Heavy duty lock-in-place ø 64 mm castors (83 mm height) (reduced height option available, totals 810 mm)			Energy Consumption (kWh/Annum)	2036



Specifications subject to change without notice.

Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland
EMEA
Australia


0800 783 2049
+41 61 563 07 05
+61 2 9619 9999

TFIUK@truemfg.com
TrueCHCustomerService@truemfg.com
TrueRefAus@truemfg.com



TUC-48F-HC

Undercounter Foodservice Freezer, 2 Solid Swing Doors

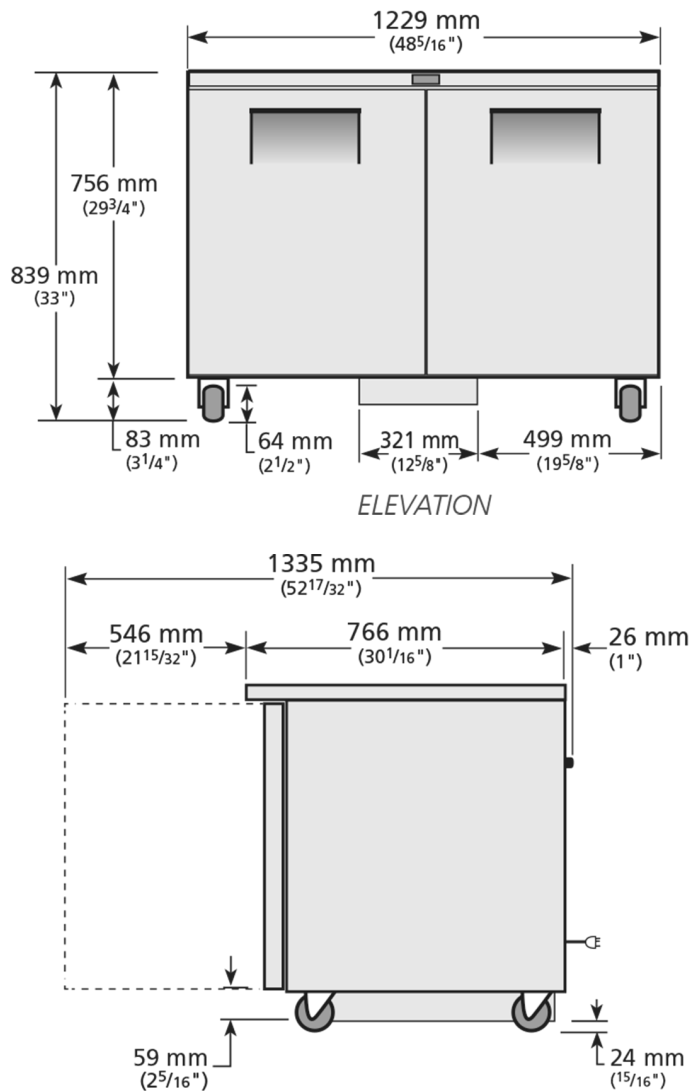

Specifications subject to change without notice.

Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland
EMEA
Australia

0800 783 2049
+41 61 563 07 05
+61 2 9619 9999

TFIUK@truemfg.com
TrueCHCustomerService@truemfg.com
TrueRefAus@truemfg.com

