


c2/c3

High-performance hydration

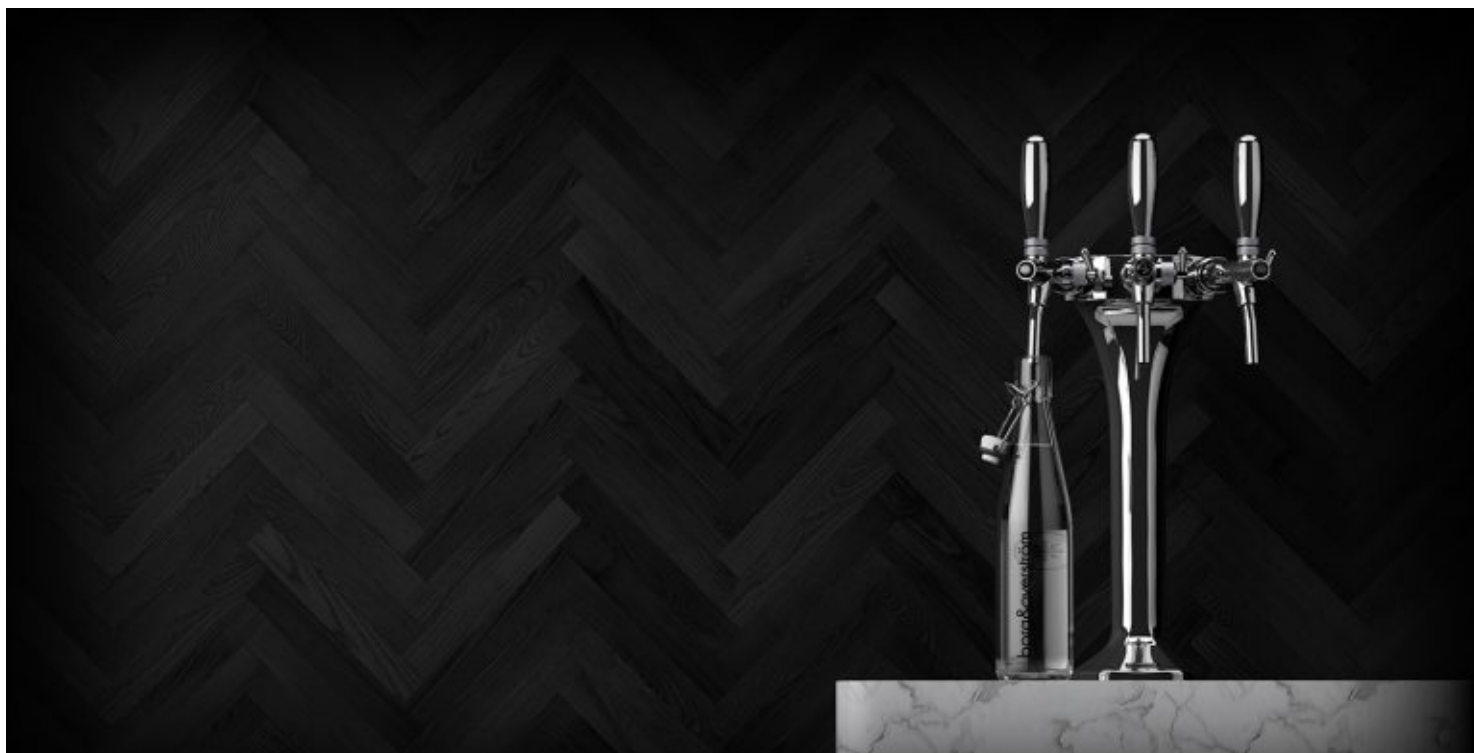

Overview

- High capacity output
- A durable performer
- Simple to operate and maintain
- Compact ProCore® processor
- Advanced UV protection built-in
- Performance-enhancing ventilation
- Versatile drip tray options
- Bluetooth® Alarmed Waste Kit
- Totality® is our unique methodology designed to ensure our appliances provide an exceptional standard of hygiene.

Specifications

Chilled temperature - 2°C
 ProCore+ chilled & sparkling capacity - **80L/h**
 Dispense height - **285**
 Tap height - **470**

Accessories

- [750ml water bottles](#)
- [Printed paper cups 463428](#)
- [Fitted driptray complete with drainage 602527](#)
- [Freestanding driptray with rubber feet 602528](#)
- [Install kit with 3M filter 461202](#)
- [Refill station cabinet](#)

C2 ProCore+ W320xD375xH335mm

Dispense Options

Chilled & Ambient
 Chilled & Sparkling

Water system

Dry Chill®
 Dry Chill®

Tap dimensions

W165xD230xH465mm
 W165xD230xH465mm

Chrome

746000
 746020

Chrome ECO-UV

[746010](#)
[746030](#)

C3 ProCore+ W320xD375xH335mm

Dispense Options

Chilled, Sparkling & Ambient
 Simple-fit Ventilation Base

W322xD431xH60mm (Includes 20mm overhang)

Water system

Dry Chill®

Tap dimensions

W215xD240xH470mm

Chrome

[746040](#)

Chrome ECO-UV

[746050](#)

borg &
overström

Find out more:

<https://www.borgandoverstrom.com/en/p/tap-systems/c2-c3/>