
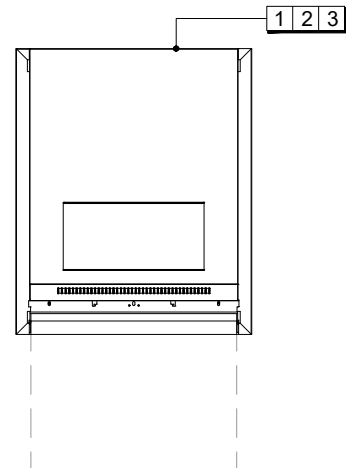
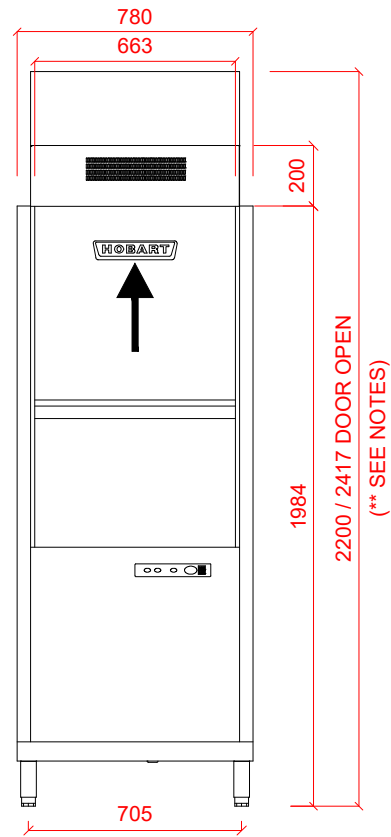


Front Loading Utensil Washer with Exhaust Heat Recovery and Inbuilt Softener

UXCS-10A

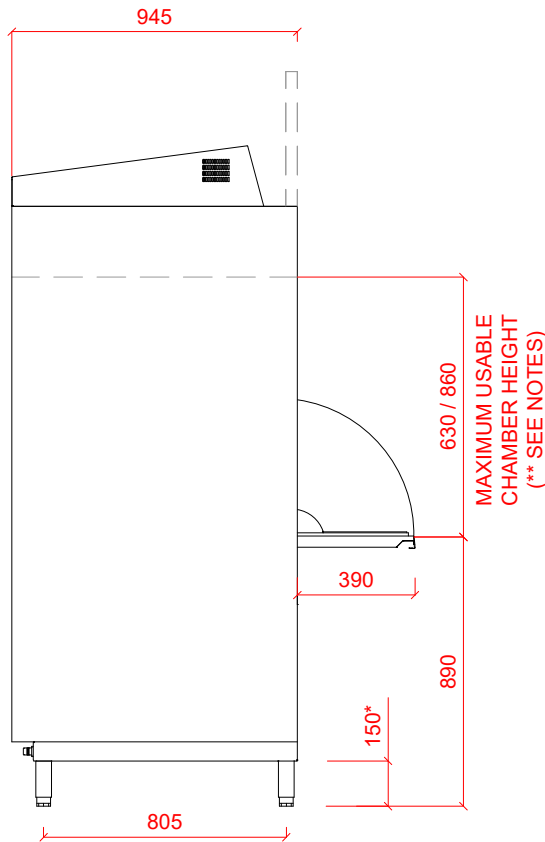

1 Water

22mm CONNECTION VIA 1.5 METRE FLEXIBLE HOSE, FEMALE TERMINATION.
WATER SUPPLY 15°C TO 60°C (2° TO 8° CLARK MAX) @ 0.8 TO 10 BAR MAX. INITIAL TANK FILL 80 LITRES.

RINSE WATER USAGE 4.5 LITRES PER CYCLE.
MAX USAGE 135 LITRES PER HOUR.
OUR MACHINES ARE SUPPLIED WITH CLASS 'AA' AIR GAP AS STANDARD.
WATER SUPPLY TO HAVE INDEPENDENT ISOLATING VALVE.

2 Drain

DRAIN - 2 METRE FLEXIBLE HOSE TO A 40 mm TRAPPED STANDPIPE 800mm A.F.F.L.

FLOW RATE 30 LITRES PER MINUTE.

Other Services

RINSE AGENT HOSE - 2.5 METRE FLEXIBLE.
DETERGENT HOSE - 2.5 METRE FLEXIBLE.

3 Electric

15.6kW 400/50/3 + N + E FUSED AT 25amps
CONFIGURABLE TO:
FOR WARM WATER SUPPLY
12.6kW 400/50/3 + N + E FUSED AT 20amps
MACHINE SUPPLIED WITH 1.8 METRES OF CABLE.

Notes

** DOOR HEIGHT CAN BE REDUCED TO 2200mm BY ADJUSTING DOOR MECHANISM.
APPROX WEIGHTS: EMPTY: 205kg's HEIGHTS MARKED * REPRESENT ±25mm