


HOBART

www.hobartuk.com

UXRCS-10N

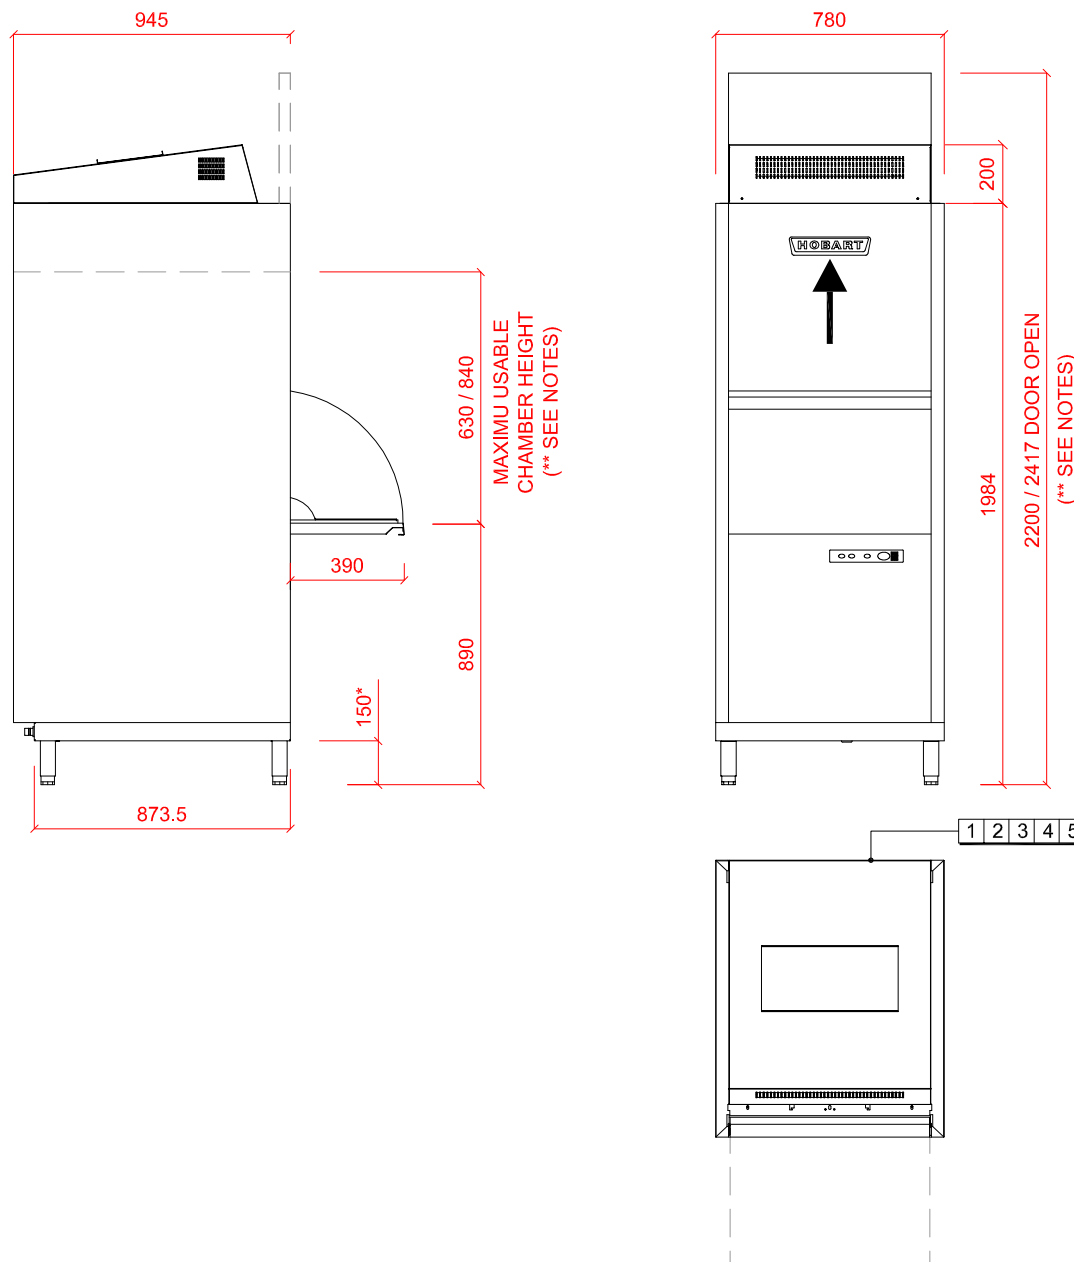

<div> <div>1</div> <div>Water</div> </div> <div> <p>22mm CONNECTION VIA 1.5 METRE FLEXIBLE HOSE, FEMALE TERMINATION.</p> <p>WATER SUPPLY UP TO 15°C @ 0.8 TO 10 BAR MAX.</p> <p>INITIAL TANK FILL 80 LITRES.</p> <p>RINSE WATER USAGE 4.5 LITRES PER CYCLE. MAX USAGE 135 LITRES PER HOUR.</p> <p>OUR MACHINES ARE SUPPLIED WITH CLASS 'AA' AIR GAP AS STANDARD.</p> <p>WATER SUPPLY TO HAVE INDEPENDENT ISOLATING VALVE.</p> </div>	<div> <div>2</div> <div>Drain</div> </div> <div> <p>DRAIN - 2 METRE FLEXIBLE HOSE TO A 40 mm TRAPPED STANDPIPE 800mm A.F.F.L.</p> <p>FLOW RATE 30 LITRES PER MINUTE.</p> </div>	<div> <div>3</div> <div>Electric Loading</div> </div> <div> <p>12.6kW 400/50/3 + N + E FUSED AT 20AMPS.</p> <p>MACHINE SUPPLIED WITH 1.8 METRES OF CABLE.</p> </div>
<div> <div>4</div> <div>5</div> <div>Other Services</div> </div> <div> <p>RINSE AGENT HOSE - 2.5 METRE FLEXIBLE.</p> <p>DETERGENT HOSE - 2.5 METRE FLEXIBLE.</p> </div>		<div> <div>Notes</div> <p>** DOOR HEIGHT CAN BE REDUCED TO 2200mm BY ADJUSTING DOOR MECHANISM</p> <p>APPROX WEIGHTS: EMPTY: 205kg's HEIGHTS MARKED * REPRESENT ±25mm</p> </div>

RIGHT TO MAKE NECESSARY CHANGES IS RESERVED