

DISHWASHER X-100 2.5 kW wash tank and 7.5 kW boiler



SALES DESCRIPTION

Commercial pass-through dishwasher with a max. loading height of up to 400 mm and 3 wash cycles with thermal cycle delay option included. A stainless steel, top of tank filter system is also included as standard.

✓ Sturdy and reliable.

Maximum productivity thanks to shorter cycles.

✓ Stainless steel, sturdy and resistant washing arms.Don't get damaged because of chemical corrosion.

 \checkmark Tank capacity above average: it takes more time to saturate the water of debris.

✓ 1.2 Hp wash pump: optimal washing results.

✓ 7.5 kW boiler: short recovery time.

✓ Full optional list.

FEATURES AND BENEFITS

 \checkmark A hood type dishwasher for both straight in line and corner situations -suitable for washing trays, as well as all types of plates, cups, glasses and cutlery.

 \checkmark Professional washing with double system of rotating wash and rinse arms top and bottom.

✓ Hood operated, auto cycle star. 3 wash cycles.

✓ Manufactured from catering grade AISI 304 2B stainless steel and incorporating top quality components.

 \checkmark The inside of the machine features rounded corners, the elimination of angles avoiding the accumulation of dirt.

✓ Removable stainless steel rack holders ensure even distribution of wash water without dead zones. Precision positioned water jets guarantee optimum washing result for even the most stubbornly stained glasses. Easy to assemble, boltless rinse spray arms.

✓ A double filter system provides effective wash pump protection that is easily removed (for maintenance and cleaning) and replaced, without tools.

 \checkmark Completely rounded, stainless steel wire rack support and guide.

 \checkmark A magnetic micro-switch stops the wash cycle, in the event of the hood being raised prematurely.

✓ Standard features include adjustable feet for levelling.

 \checkmark A stainless steel, top of tank filter system is also included as standard.

Rinse aid dosing equipment.

 \checkmark Adjustable washing tank and boiler temperature and security in the boiler.

 \checkmark Thermal cycle delay option, guaranteeing a minimum final rinse temperature of 85°C for each and every rinse cycle.

 \checkmark Sammic ware washers are designed for easy and fast on-site maintenance.

√ 100% tested.

NCLUDES

- Rinse aid pump and detergent dosing equipment.
- ent 🛛 🗸 1 cutlery basket.
 - Stainless steel top-of-tank filter set.
- ✓ 1 open basket.✓ 1 plate basket.

AENOR Received a state of the state of the



www.sammic.co.uk Food Service Equipment Manufacturer Unit 2, Trevanth Road Troon Industrial Park LE4 9LS - Leicester

uksales@sammic.com Tel.: +44 0116 246 1900



Project	Date
Item	Qty
Approved	



DISHWASHER X-100

2.5 kW wash tank and 7.5 kW boiler

Specifications

Basket dimensions: 500 mm x 500 mm Maximum glass height: 400 mm Cycles: 3 Cycle duration: 60 " / 120 " / 180 " Production baskets/hour: 60 / 30 / 20


- ✓ Boiler capacity: 101
- ✓ Wash tank capacity: 40 I
- ✓ Water consumption/cycle: 3.5 I


Loading

- ✓ Pump: 880 W / 1.2 Hp
- √ Tank: 2500 W
- ✓ Boiler: 7500 W
- ✓ Total loading: 8380 W

External dimensions (WxDxH)

- √ Width:640 mm
- ✓ Depth: 756 mm
- √ Height: 1920 mm / 1468 mm
- Net weight: 115 Kg
- Wash temperature: 65 °C
- Rinse temperature: 90 °C
- Noise level (1m.): <70 dB(A)

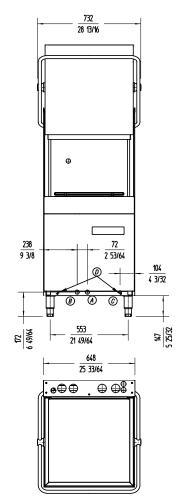

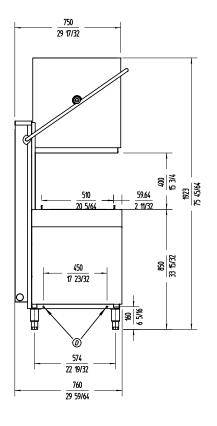

AVAILABLE MODELS

- 1302222 Dishwasher X-100 230/50/1 DD
- 1302226 Dishwasher X-100B 230/50/1 DD (with drain pump)
- 1302230 Dishwasher X-100C 230/50/1 DD (with break tank and drain pump)

* Ask for special versions availability

ACCESSORIES

- Filters for dishwashers
- Dosing equipments
- Tables for dishwashers P/X/S (pass-through model)
- Manual water softeners

- Automatic water softeners
- □ 500 x 500 mm. baskets
- Inserts, supplements & similar
- High Feet Kit
- Booster pump kit



www.sammic.co.uk Food Service Equipment Manufacturer

Unit 2, Trevanth Road Troon Industrial Park LE4 9LS - Leicester

uksales@sammic.com Tel.: +44 0116 246 1900



Project	Date
Item	Qty
Approved	

product sheet updated 06/03/2018