

DISHWASHER X-120 3 kW wash tank and 9kW boiler



SALES DESCRIPTION

Commercial pass-through dishwasher with a max. loading height of up to 400 mm and 3 wash cycles with thermal cycle delay option included. A stainless steel, top of tank filter system is also included as standard.

- ✓ Sturdy and reliable.
- Maximum productivity thanks to shorter cycles.
- ✓ Full optional list.
- WRAS approved versions available.

FEATURES AND BENEFITS

 \checkmark A hood type dishwasher for both straight in line and corner situations -suitable for washing trays, as well as all types of plates, cups, glasses and cutlery.

 \checkmark Professional washing with double system of rotating wash and rinse arms top and bottom.

✓ Hood operated, auto cycle star. 3 wash cycles.

 \checkmark Manufactured from catering grade AISI 304 2B stainless steel and incorporating top quality components.

 \checkmark The inside of the machine features rounded corners, the elimination of angles avoiding the accumulation of dirt.

✓ Removable stainless steel rack holders ensure even distribution of wash water without dead zones. Precision positioned water jets guarantee optimum washing result for even the most stubbornly stained glasses. Easy to assemble, boltless rinse spray arms.

✓ A double filter system provides effective wash pump protection that is easily removed (for maintenance and cleaning) and replaced, without tools.

 \checkmark Completely rounded, stainless steel wire rack support and guide.

 \checkmark A magnetic micro-switch stops the wash cycle, in the event of the hood being raised prematurely.

✓ Standard features include adjustable feet for levelling.

 \checkmark A stainless steel, top of tank filter system is also included as standard.

Rinse aid dosing equipment.

 \checkmark Adjustable washing tank and boiler temperature and security in the boiler.

 \checkmark Thermal cycle delay option, guaranteeing a minimum final rinse temperature of 85°C for each and every rinse cycle.

 \checkmark Sammic ware washers are designed for easy and fast on-site maintenance.

✓ 100% tested.

NCLUDES

- ✓ Detergent and rinse aid doser.
- ✓ 1 open basket.
- 1 mixed basket.1 cutlery basket.





www.sammic.co.uk Food Service Equipment Manufacturer Unit 2, Trevanth Road Troon Industrial Park

uksales@sammic.com Tel.: +44 0116 246 1900

LE4 9LS - Leicester



Project	Date
Item	Qty
Approved	

product sheet updated 06/03/2018



DISHWASHER X-120

3 kW wash tank and 9kW boiler

Basket dimensions: 500 mm x 500 mm Maximum glass height: 400 mm Cycles: 3 Cycle duration: 60 " / 120 " / 180 " Production baskets/hour: 60 / 30 / 20 ✓ Boiler capacity: 121


- ✓ Wash tank capacity: 40 I
- ✓ Water consumption/cycle: 3.5 I


Loading

- ✓ Pump: 1500 W / 2 Hp
- ✓ Tank: 3000 W
- ✓ Boiler: 9000 W
- ✓ Total loading: 10500 W

External dimensions (WxDxH)

- √ Width:640 mm
- ✓ Depth: 756 mm
- ✓ Height: 1920 mm / 1468 mm
- Water Intake: 3/4 "
- Wash temperature: 65 °C
- Rinse temperature: 90 °C
- Net weight: 129 Kg
- Noise level (1m.): <70 dB(A)

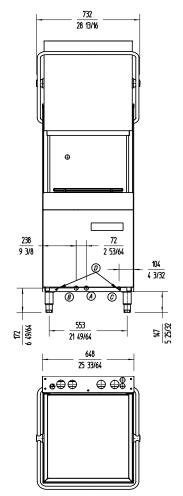

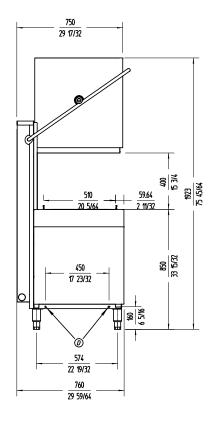

AVAILABLE MODELS

- 1302261 Dishwasher X-120 400/50/3 DD
- 1302265 Dishwasher X-120B 400/50/3 DD (with drain pump)
- 1302269 Dishwasher X-120C 400/50/3 DD (with break tank and drain pump)

* Ask for special versions availability

ACCESSORIES

- Filters for dishwashers
- Dosing equipments
- □ Tables for dishwashers P/X/S (pass-through model)
- Manual water softeners

- Automatic water softeners
- □ 500 x 500 mm. baskets
- Inserts, supplements & similar
- High Feet Kit
- Booster pump kit



www.sammic.co.uk Food Service Equipment Manufacturer

Unit 2, Trevanth Road Troon Industrial Park LE4 9LS - Leicester

uksales@sammic.com Tel.: +44 0116 246 1900



Project	Date
Item	Qty
Approved	

updated 06/03/2018 product sheet