

GLASSWASHER UX-40BC 230/50/1 DD

Rack size 400 mm x 400 mm and door clearance 300 mm. Constant temperature rinsing

P/N 1303123



The surface filters feature an "easy-on" design and can be quickly removed without having to disconnect the washing arms.

"Easy grip" door: new design with integrated door handle

- √ The integration of the components provides greater resistance and robustness.
- Designed to have no corners or areas that are difficult to access: prevents deposits of dirt and facilitates cleaning.
- ✓ Its ergonomic handle provides a perfect grip, even with wet hands.
- ✓ Double-walled door with safety microswitch and high quality seal
- 30 cm load capacity: high versatility for washing a wide range of glasses and even medium-sized dishes.

Premium warewashing

- ✓ Ultra Xperience: high performance, without complications.
- √ Soft start: progressive start-up of the washing pump to protect fragile items.
- Colour LCD Display: intuitive communication of the machine status by means of messages, colour codes and icons.
- Dedicated cycles: selection of the ideal washing programme using
- Adaptable: allows the main parameters of the machine to be adjusted to the needs of each user.
- TEMPERATURE DISPLAY
- Wash Plus+ function: increases the intensity of the wash cycle for greater cleaning performance
- Control panel with IP65 humidity protection.

You will never WASH ALONE

- √ Tech-Services: our team of technicians will help you so that your machine is always ready for use.
- ✓ Design Services: tell us what your needs are and we will advise you.
- √ 60 years of experience and know-how at your disposal.

Sani-Control guarantee

SALES DESCRIPTION

3-stage filtering system.

Double-walled body (partial).

ergonomic

effectiveness.

Sani-Control: guaranteed disinfection

- ✓ GUARANTEED DISINFECTION in compliance with standard DIN 10534.
- √ THERMAL LOCK function: Ensures that rinsing will be carried out at the ideal temperature to disinfect the dishes.

Embedded bodywork and easy-grip door: hygienic and

Exclusive Hydroblade™ washing arms: maximum

- ✓ CONSTANT HIGH TEMPERATURE RINSE system for optimal disin-
- √ The PRESSURE PUMP guarantees effective high-pressure rinsing.

New recessed bodywork

- Ergonomic design with rounded corners to prevent the accumulation of dirt and facilitate cleaning.
- Compact tank volume (50% water saving compared to the previous
- √ Embedded basket guides

Hydroblade™ washing arms

- Redesigned nozzles for greater washing performance.
- The "monoblock" design delivers durability and resistance to impacts.
- 30% savings in water consumption during rinsing compared to the previous range.

3-stage filter system: surface, tank and extraction

Keeps the washing water in optimal conditions to maintain constant washing performance.





INCLUDES

- ✓ Drainage pump with level sensor. Proactive tank water renewal.
- ✓ Detergent Dispenser.
- √ 1 glasses basket.
- 1 mixed basket (plates).
- 1 small basket for cutlery.

OPTIONAL

■ Manual resin regeneration

water softener.

SPECIFICATIONS

Basket dimensions: 400 mm x 400 mm

Useful height: 300 mm

Cycle duration: 90 / 120 / 150 / 180" Production baskets / hour: 40 / 30 / 24 / 20

Boiler capacity: 4.5 l Wash tank capacity: 9 I

Consumption and savings

Water consumption/cvcle: 1.9 l Automatic saving mode in: 25' Automatic switch-off: 120'

Loading

- ✓ Pump: 250 W / 0.33 Hp
- √ Tank: 1200 W
- √ Boiler: 2500 W
- √ Total loading: 2750 W

Electrical supply: 230 V / 50 Hz / 1~ (12 A)

GLASSWASHER UX-40BC 230/50/1 DD

Rack size 400 mm x 400 mm and door clearance 300 mm. Constant temperature rinsing system.

P/N 1303123

External dimensions (W x D x H)

√ Width:470 mm


√ Depth: 540 mm

✓ Height: 710 mm

Net weight: 40 kg

Crated dimensions

525 x 615 x 820 mm Gross weight: 46 kg

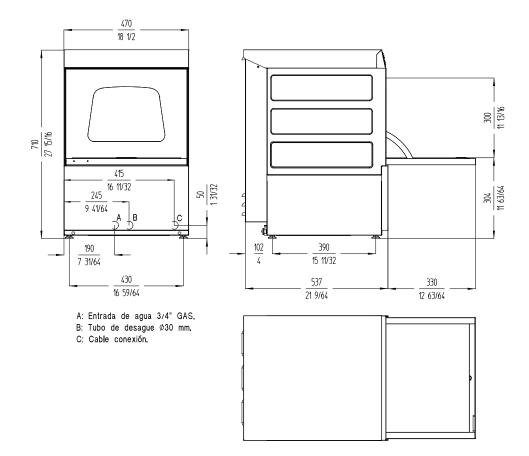



www.sammic.co.uk

Food Service Equipment Manufacturer Unit 2, Trevanth Road Troon Industrial Park LE4 9LS - Leicester

uksales@sammic.com Tel.: +44 0116 246 1900



	Project	Date
	Item	Qty

Approved