



DISHWASHER UX-50BC 400/50/3N DD

Rack size 500x500mm and door clearance 380 mm. Multi-power version.



1303243



WARE WASHING
COMMERCIAL DISHWASHERS

SALES DESCRIPTION

Sani-Control: guaranteed disinfection.
Embedded bodywork and easy-grip door: hygienic and ergonomic
Exclusive Hydroblade™ washing arms: maximum effectiveness.
3-stage filtering system.
Double-walled body (partial).
Multi-power model. Default boiler loading: 2000W.

Multi-phase dishwasher:

- ✓ 230V / 50Hz / 1~ (standard)
- ✓ 400V / 50Hz / 3N~
- ✓ 230V / 50Hz / 3~

Sani-Control guarantee

- ✓ GUARANTEED DISINFECTION in compliance with standard DIN 10534.
- ✓ THERMAL LOCK function: Ensures that rinsing will be carried out at the ideal temperature to disinfect the dishes.

New recessed bodywork

- ✓ Ergonomic design with rounded corners to prevent the accumulation of dirt and facilitate cleaning.
- ✓ Compact tank volume (50% water saving compared to the previous range).
- ✓ Embedded basket guides

Hydroblade™ washing arms

- ✓ Redesigned nozzles for greater washing performance.
- ✓ The “monoblock” design delivers durability and resistance to impacts.
- ✓ 30% savings in water consumption during rinsing compared to the previous range.

3-stage filter system: surface, tank and extraction

- ✓ Keeps the washing water in optimal conditions to maintain constant washing performance.
- ✓ The surface filters feature an “easy-on” design and can be quickly removed without having to disconnect the washing arms.

“Easy grip” door: new design with integrated door handle

- ✓ The integration of the components provides greater resistance and robustness.
- ✓ Designed to have no corners or areas that are difficult to access: prevents deposits of dirt and facilitates cleaning.
- ✓ Its ergonomic handle provides a perfect grip, even with wet hands.
- ✓ Double-walled door with safety microswitch and high quality seal
- ✓ 38 cm loading capacity: high versatility for washing a wide range of items: dishes, Euronorm trays, GN 1/1 tubs and pizza plates diam 39

Premium warewashing

- ✓ Ultra Xperience: high performance, without complications.
- ✓ Soft start: progressive start-up of the washing pump to protect fragile items.
- ✓ Colour LCD Display: intuitive communication of the machine status by means of messages, colour codes and icons.
- ✓ Dedicated cycles: selection of the ideal washing programme using icons.
- ✓ Adaptable: allows the main parameters of the machine to be adjusted to the needs of each user.
- ✓ TEMPERATURE DISPLAY
- ✓ Wash Plus+ function: increases the intensity of the wash cycle for greater cleaning performance
- ✓ Control panel with IP65 humidity protection.

You will never WASH ALONE

- ✓ Tech-Services: our team of technicians will help you so that your machine is always ready for use.
- ✓ Design Services: tell us what your needs are and we will advise you.
- ✓ 60 years of experience and know-how at your disposal.

INCLUDES

- ✓ Detergent Dispenser.
- ✓ Rinse aid pump.
- ✓ Drainage pump with level sensor. Proactive tank water renewal.
- ✓ 1 glasses basket.
- ✓ 1 mixed basket (plates).
- ✓ 1 small basket for cutlery.

ACCESSORIES

- Stands for glass- and dishwashers
- Inserts & supplements
- Manual water softeners
- High Feet Kit
- Automatic water softeners
- Reverse Osmosis device OS-140P
- 500 x 500 mm. baskets



www.sammic.co.uk

Food Service Equipment Manufacturer

Unit 2, Trevanth Road
Troon Industrial Park
LE4 9LS - Leicester

uksales@sammic.com
Tel.: +44 0116 246 1900



Project	Date
Item	Qty
Approved	

product sheet
updated 29/12/2021



DISHWASHER UX-50BC 400/50/3N DD

Rack size 500x500mm and door clearance 380 mm. Multi-power version.



1303243

SPECIFICATIONS

Basket dimensions: 500 mm x 500 mm
Maximum glass height: 380 mm

Cycle duration: -- " / -- " / -- "
Production baskets/hour: -- / -- / --

Wash temperature: -- °C - -- °C
Rinse temperature: 65 °C - 87 °C

Boiler capacity: 8 l
Wash tank capacity: 14 l

Consumption and savings

Water consumption/cycle: 2.5 l
Automatic saving mode in: 25 '
Automatic switch-off: 120 '

Loading

Pump: -- W / -- Hp
Tank: 1800 W

Boiler: 5000 W
Total loading: 5750 W


Electrical supply: 400 V / 50 Hz / 3N ~ (8.5 A)

External dimensions (WxDxH)

- ✓ Width: 580 mm
 - ✓ Depth: 635 mm
 - ✓ Height: 835 mm
- Net weight: 66 Kg
Noise level (1m.): -- dB(A)

Crated dimensions

640 x 695 x 960 mm
Gross weight: 73 Kg.

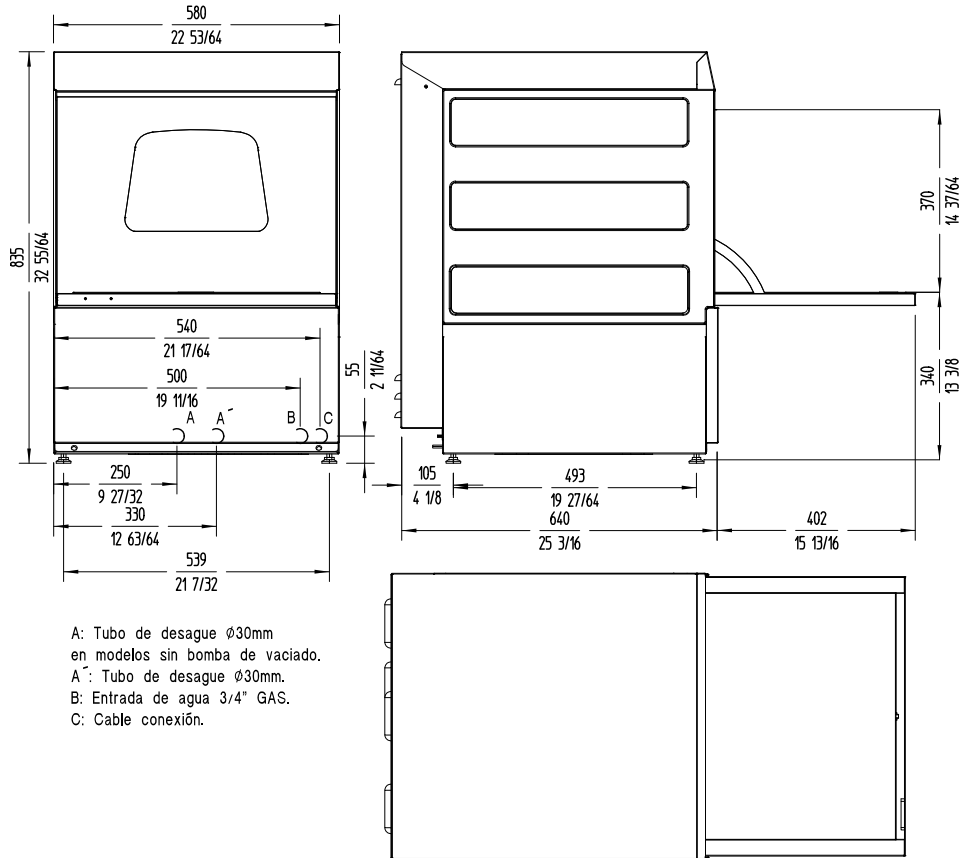

A: Tubo de desague Ø30mm en modelos sin bomba de vaciado.
 A': Tubo de desague Ø30mm.
 B: Entrada de agua 3/4" GAS.
 C: Cable conexión.

WARE WASHING
COMMERCIAL DISHWASHERS



www.sammic.co.uk

Food Service Equipment Manufacturer

Unit 2, Trevanah Road
Troon Industrial Park
LE4 9LS - Leicester

uksales@sammic.com
Tel.: +44 0116 246 1900



Project

Date

Item

Qty

Approved

product sheet
updated 29/12/2021