DISHWASHER UX-50SBC 400/50/3N DD

Rack size 500x500mm and door clearance 380 mm. Multi-power version.

1303283



SALES DESCRIPTION

Sani-Control: guaranteed disinfection

Embedded bodywork and easy-grip door: hygienic and ergonomic

Exclusive Hydroblade™ washing arms: maximum effectiveness.

3-stage filtering system.

Double-walled body (partial).

Multi-power model. Default boiler loading: 2000W

Multi-phase dishwasher:

- √ 230V / 50Hz / 1~ (standard)
- √ 400V / 50Hz / 3N~
- √ 230V / 50Hz / 3~

Sani-Control guarantee

- GUARANTEED DISINFECTION in compliance with standard DIN 10534.
- √ THERMAL LOCK function: Ensures that rinsing will be carried out at the ideal temperature to disinfect the dishes.

New recessed bodywork

- Ergonomic design with rounded corners to prevent the accumulation of dirt and facilitate cleaning.
- Compact tank volume (50% water saving compared to the previous range).
- √ Embedded basket guides



sammic





www.sammic.co.uk

Food Service Equipment Manufacturer Unit 2 Treventh Road Troon Industrial Park LE4 9LS - Leicester

uksales@sammic.com Tel.: +44 0116 246 1900



Hydroblade™ washing arms

- Redesigned nozzles for greater washing performance.
- √ The "monoblock" design delivers durability and resistance to im-
- 30% savings in water consumption during rinsing compared to the previous range.

3-stage filter system: surface, tank and extraction

- Keeps the washing water in optimal conditions to maintain constant washing performance.
- √ The surface filters feature an "easy-on" design and can be quickly removed without having to disconnect the washing arms.

"Easy grip" door: new design with integrated door handle

- √ The integration of the components provides greater resistance and robustness.
- Designed to have no corners or areas that are difficult to access: prevents deposits of dirt and facilitates cleaning.
- Its ergonomic handle provides a perfect grip, even with wet hands.
- ✓ Double-walled door with safety microswitch and high quality seal
- 38 cm loading capacity: high versatility for washing a wide range of items: dishes, Euronorm trays, GN 1/1 tubs and pizza plates diam 39

Premium warewashing

- Ultra Xperience: high performance, without complications.
- Soft start: progressive start-up of the washing pump to protect
- √ Colour LCD Display: intuitive communication of the machine status by means of messages, colour codes and icons.
- Dedicated cycles: selection of the ideal washing programme using
- Adaptable: allows the main parameters of the machine to be adjusted to the needs of each user.
- √ TEMPERATURE DISPLAY
- Wash Plus+ function: increases the intensity of the wash cycle for greater cleaning performance
- Control panel with IP65 humidity protection.

You will never WASH ALONE

- √ Tech-Services: our team of technicians will help you so that your machine is always ready for use.
- ✓ Design Services: tell us what your needs are and we will advise you.
- √ 60 years of experience and know-how at your disposal.

NCLUDES

- ✓ Detergent Dispenser.
- 1 glasses basket.
- √ 1 mixed basket (plates).
- √ 1 small basket for cutlery.
- Drainage pump with level sensor. Proactive tank water renewal.

Accessories

Stands	for	glass-	and	dishwas-
hers				

- Manual water softeners
- Automatic water softeners
- □ 500 x 500 mm. baskets
- ☐ Inserts & supplements
- ☐ High Feet Kit
- ☐ Reverse Osmosis device OS-140P

Project	Date
Item	Qty

Approved

DISHWASHER UX-50SBC 400/50/3N DD Rack size 500x500mm and door clearance 380 mm. Multi-power version.



SPECIFICATIONS

Basket dimensions: 500 mm x 500 mm Maximum glass height: -- mm

Cycle duration: -- " / -- " / -- "

Production baskets/hour: -- / -- / --

Wash temperature: -- °C - -- °C

Rinse temperature: -- °C - -- °C

Boiler capacity: -- I Wash tank capacity: -- I

Consumption and savings

Water consumption/cycle: -- I Automatic saving mode in: 25 ' Automatic switch-off: 120 '

Loading

Pump: -- W / -- Hp

Tank: -- W

Boiler: -- W

Total loading: 5750 W


Electrical supply: -- V / -- Hz / -- ~ (-- A)

External dimensions (WxDxH)

- √ Width:-- mm
- ✓ Depth: -- mm
- √ Height: -- mm

Net weight: -- Kg

Noise level (1m.): -- dB(A)

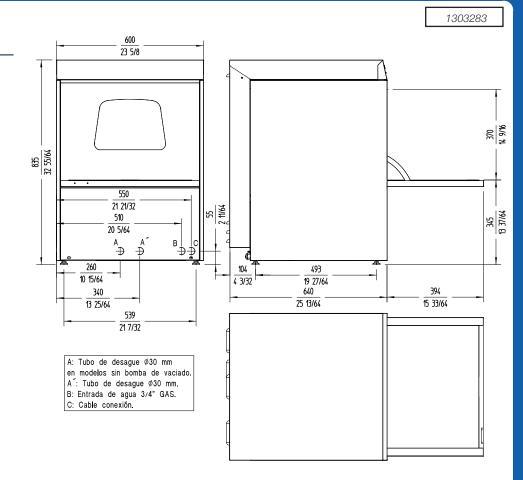



www.sammic.co.uk

Food Service Equipment Manufacturer Unit 2, Trevanth Road Troon Industrial Park LE4 9LS - Leicester

uksales@sammic.com Tel.: +44 0116 246 1900



Project	Date
Item	Qty

Approved