



DISHWASHER X-120

3 kW wash tank and 9kW boiler



WARE WASHING
PASS-THROUGH DISHWASHERS



SALES DESCRIPTION

Commercial pass-through dishwasher with a max. loading height of up to 400 mm and 3 wash cycles with thermal cycle delay option included. A stainless steel, top of tank filter system is also included as standard.

- ✓ Sturdy and reliable.
- ✓ Maximum productivity thanks to shorter cycles.
- ✓ Full optional list.
- ✓ **WRAS approved versions available.**

FEATURES AND BENEFITS

- ✓ A hood type dishwasher for both straight in line and corner situations -suitable for washing trays, as well as all types of plates, cups, glasses and cutlery.
- ✓ Professional washing with double system of rotating wash and rinse arms top and bottom.
- ✓ Hood operated, auto cycle star. 3 wash cycles.
- ✓ Manufactured from catering grade AISI 304 2B stainless steel and incorporating top quality components.
- ✓ The inside of the machine features rounded corners, the elimination of angles avoiding the accumulation of dirt.
- ✓ Removable stainless steel rack holders ensure even distribution of wash water without dead zones. Precision positioned water jets guarantee optimum washing result for even the most stubbornly stained glasses. Easy to assemble, boltless rinse spray arms.
- ✓ A double filter system provides effective wash pump protection that is easily removed (for maintenance and cleaning) and replaced, without tools.
- ✓ Completely rounded, stainless steel wire rack support and guide.
- ✓ A magnetic micro-switch stops the wash cycle, in the event of the hood being raised prematurely.
- ✓ Standard features include adjustable feet for levelling.
- ✓ A stainless steel, top of tank filter system is also included as standard.
- ✓ Rinse aid dosing equipment.
- ✓ Adjustable washing tank and boiler temperature and security in the boiler.
- ✓ Thermal cycle delay option, guaranteeing a minimum final rinse temperature of 85°C for each and every rinse cycle.
- ✓ Sammic ware washers are designed for easy and fast on-site maintenance.
- ✓ 100% tested.

INCLUDES

- ✓ Detergent and rinse aid doser.
- ✓ 1 mixed basket.
- ✓ 1 open basket.
- ✓ 1 cutlery basket.



www.sammic.co.uk
 Food Service Equipment Manufacturer
 Unit 2, Trevanah Road
 Troon Industrial Park
 LE4 9LS - Leicester
 uksales@sammic.com
 Tel.: +44 0116 246 1900



Project	Date
Item	Qty
Approved	

product sheet
updated 06/03/2018



DISHWASHER X-120

3 kW wash tank and 9kW boiler



SPECIFICATIONS


- Basket dimensions: 500 mm x 500 mm
- Maximum glass height: 400 mm
- Cycles: 3
- Cycle duration: 60 " / 120 " / 180 "
- Production baskets/hour: 60 / 30 / 20
- ✓ Boiler capacity: 12 l
- ✓ Wash tank capacity: 40 l
- ✓ Water consumption/cycle: 3.5 l

Loading

- ✓ Pump: 1500 W / 2 Hp
- ✓ Tank: 3000 W
- ✓ Boiler: 9000 W
- ✓ Total loading: 10500 W

External dimensions (WxDxH)

- ✓ Width: 640 mm
- ✓ Depth: 756 mm
- ✓ Height: 1920 mm / 1468 mm
- Water Intake: 3/4 "
- Wash temperature: 65 °C
- Rinse temperature: 90 °C
- Net weight: 129 Kg
- Noise level (1m.): <70 dB(A)

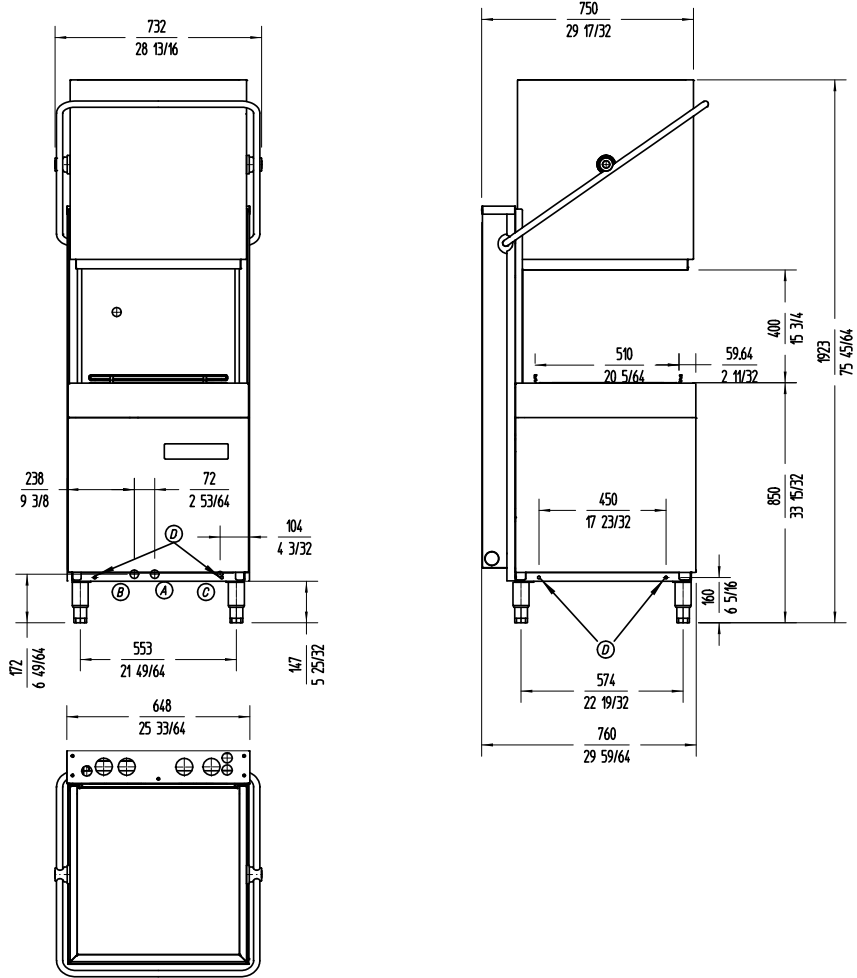

AVAILABLE MODELS

- 1302261 Dishwasher X-120 400/50/3 DD
- 1302265 Dishwasher X-120B 400/50/3 DD (with drain pump)
- 1302269 Dishwasher X-120C 400/50/3 DD (with break tank and drain pump)

* Ask for special versions availability

ACCESSORIES

- Filters for dishwashers
- Dosing equipments
- Tables for dishwashers P/X/S (pass-through model)
- Manual water softeners
- Automatic water softeners
- 500 x 500 mm. baskets
- Inserts, supplements & similar
- High Feet Kit
- Booster pump kit

WARE WASHING
PASS-THROUGH DISHWASHERS



www.sammic.co.uk
Food Service Equipment Manufacturer
 Unit 2, Trevanah Road
 Troon Industrial Park
 LE4 9LS - Leicester
 uksales@sammic.com
 Tel.: +44 0116 246 1900



Project	Date
Item	Qty
Approved	

product sheet
updated 06/03/2018