



OE8018 - Lincat Opus 800 Electric Counter-top Induction Hob - W 400 mm - 10.6 kW

Combining raw power with energy efficiency, the Opus 800 2 Zone Induction Hob delivers 90% efficiency compared to 55% with a solid electric hot plate and 50% with a gas hob.

- ✓ Two powerful 5.3kW, 270mm width induction zones
- ✓ Automatic pan detection function cuts power when no pan is present, preventing harm to users, while saving energy
- ✓ Multiple internal cooling fans and overheat protection for long service life
- ✓ Easy to change filter built into the base of the unit
- ✓ No open flames so no radiating heat - reduce ambient temperature of kitchen for a more comfortable working temperature
- ✓ Delivers 90% efficiency compared to 55% with a solid electric hot plate and 50% with a gas hob
- ✓ Designed to suite with Opus 800 series and available with Opus 800 stands and pedestals

Specifications

Summary

| | |
|-----------------------------|-----------------------------------|
| Brand | Lincat |
| Range | Opus 800 |
| Power Type | Electric |
| Unit Type | Counter-top |
| Available in UK Only | No |
| UK Warranty | 2 Years Parts and Labour Warranty |
| Export Warranty | Contact your local dealer |
| GTIN | 5056105121343 |

Power and Performance

| | |
|----------------------------|------------|
| Total Power kW | 10.6 |
| IP Rating | IP24 |
| Temperature Control | Mechanical |
| Rating per Hob kW | 5.3 |

Key Specifications

| | |
|-----------------------|-------|
| Number of Hobs | 2 |
| Shape of Hob | Round |

Weights and Dimensions

| | |
|----------------------------------|-----|
| Unit Height (External) mm | 308 |
| Unit Width (External) mm | 400 |
| Unit Depth (External) mm | 800 |
| Hob Dimensions mm | 270 |
| Net Weight Kg | 24 |

Supply Connections

| | |
|---------------------------------------|---------------------------|
| Requires Installation | Yes |
| Requires Electrical Supply | Yes |
| UK 3 Pin Plug | No |
| Requires Hardwiring | Yes |
| Electrical Supply Rating Watts | 10,600 |
| Three Phase Amps | L1=15.3; L2=15.3; L3=15.3 |
| Three Phase Voltage | 400 |




Shipping

| | |
|-------------------------|------|
| Packed Weight Kg | 31.5 |
| Packed Height cm | 63 |
| Packed Width cm | 85 |
| Packed Depth cm | 45 |

Available Accessories

| | |
|---------------|---|
| OA8921 | Lincat Opus 800 Free-standing Floor Stand with Legs - for units W 400 mm |
| OA8971 | Lincat Opus 800 Free-standing Pedestal with Doors and Legs - for units W 400 mm |

Technical Picture

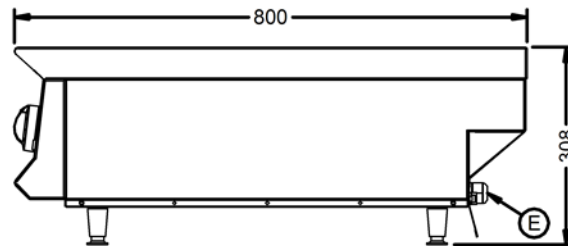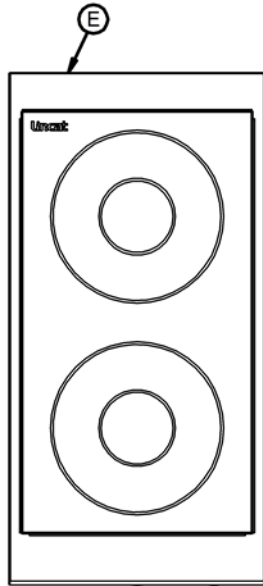

Lincat Limited

Whisby Road,
Lincoln, LN6 3QZ,
United Kingdom

Company No: 2175448

A member company of



Customer Care

Tel: +44 1522 875500
Email: care@lincat.co.uk

Export Customers

Tel: +44 1522 503250
Email: export@lincat.co.uk

Opening Hours

Monday – Friday:
8.30am – 5pm