



Product Code: EP700L2 10-145

EcoPro G2 600 Litre Upright Half Door Freezer Cabinet



Features & Benefits

- The half door option is designed to save energy
- All new thicker and more robust cabinet design with advanced thermal efficiency and market leading capacity making your money go further
- New 'smartphone style' touch sensitive hidden-until-lit control panel with unique high visibility temperature display combines sophistication with functionality
- All-new ergonomic door and handle design for ease of opening and cleaning
- Designed using high technology: 'Fluid Food-Fresh Dynamics' modelling, the new and improved advanced Foster Circular II air distribution system maximises efficient operation even when shelves are fully loaded
- Brand-new refrigeration system designed to be the most technologically advanced and energy efficient yet
- Keep accessible products in the top section, bottom half can remain shut for longer preventing cold air loss.

External Finish

s/steel ext, 304 s/s door	Standard
304 S/S back for island sitting	Option

Base Fittings

Castors 80mm	Standard
--------------	----------

Electrical, Service & Ecodesign Data

230/50/1	Standard
220/60/1 Electrical Supply	Option
Fuse Required	13
kWh (24 hours)	4.87

Internal Finish

aluminium	Standard
-----------	----------

Doors

Half	Standard
------	----------

Left Hand Hinged Door	Option
-----------------------	--------

Product Extras

Helicoil Mains Lead	Option
---------------------	--------

Shelving

Additional S/S Trayslides	Option
---------------------------	--------

Additional GN2/1 Shelf	Option
------------------------	--------

Refrigeration

R290 - Energy Efficient	Standard
-------------------------	----------


Less Condensing Unit	Option
----------------------	--------

Specification

Dimensions (Width)	700
Dimensions (Height)	2080
Dimensions (Depth)	820
Weight (Unpacked, kg)	121
Weight (Packed, kg)	132.6
Gross Volume	600
Noise DbA @ 1M	64.1

Footnotes

- 150mm castors are not available if product is supplied less condensing unit
- Adequate airflow and service space must be kept above the top of cabinet: 310mm
- Depth with door open is 1500mm
- Decibel rating measured 1m high from the floor and 1m out from the cabinet

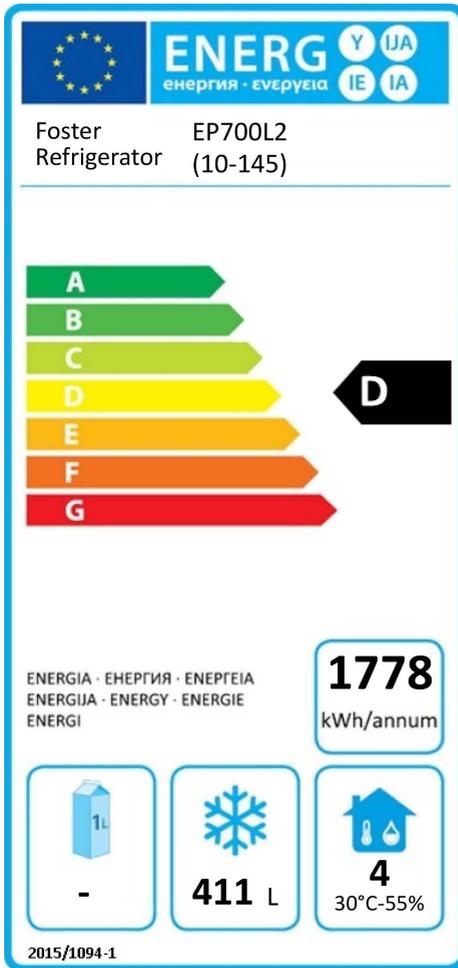

Application

This appliance is intended for use in ambient temperatures up to 40°C

Safety

Precautionary instructions and maintenance advice, to ensure efficient operation, can be found in this products operating instructions.

Recycling

For recycling and end of life care for this product, please refer to environmental section of the website or visit [our policies](#)



Energy



Quality



Value



Design



Hygiene



After Care