

Blast Chiller Freezers Crosswise Blast Chiller-Freezer Crosswise - 100 kg 20GN 1/1 (R452A)

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____


725222 (ECBCFA100SE)

 Blast Chiller & Freezer
 Crosswise 100kg, compatible
 with 20x1/1GN Convection
 Oven Crosswise - R452A

Short Form Specification

Item No.

Blast chiller/freezer with digital temperature and time display. For 20 GN 1/1 or 600x400 mm trays (h = 65 mm). Load capacity: chilling 100 kg; freezing 65 kg. Automatic detection of food probe insertion. Automatic and Manual defrost. Blast chilling real remaining time estimation (A.R.T.E.). Turbo cooling function. Thawing function. HACCP and Service alarms with data logging. Connectivity ready. Operating air temperature: +10/-36°C. Single sensor food probe. Main components in 304 AISI stainless steel. Internal rounded corners and drain. Evaporator with antirust protection. Performances guaranteed at ambient temperature of +40°C. Cyclopentane insulation (HCFC, CFC and HFC free). R452a refrigerant gas (HCFC and CFC free). Built-in refrigeration unit.

Main Features

- Blast Chilling cycle: 100 kg from 90°C up to 3°C in less than 90 minutes.
- Blast Freezing cycle: 65 kg from 90°C up to -18°C in less than 240 min.
- Chilling cycle with automatic preset cycles:
 - Soft Chilling (air temperature 0°C), ideal for delicate food and small portions.
 - Hard Chilling (air temperature -12°C), ideal for solid food and whole pieces.
- Freezing cycle with automatic preset cycles (air temperature -36°C), ideal for all kind of food (raw, half or fully cooked).
- Turbo cooling: chiller works continuously at the desired temperature; ideal for continuous production.
- Thawing cycle (air temperature 7°C), ideal for defrosting food in a controlled and safe environment.
- Possibility to modify the cavity temperature in turbo cooling and thawing cycles.
- Remaining time estimation for probe-driven cycles based on artificial intelligence techniques (ARTE) for an easier planning of the activities.
- Single sensor core probe as standard.
- Control unit provides two large displays to read out: time, core temperature, cycle countdown, alarms, service information.
- On-board HACCP monitoring capable.
- Connectivity ready for real time access to connected appliances from remote and HACCP monitoring (requires optional accessory).
- Performance guaranteed at ambient temperatures of +40°C (Climatic class 5).
- Automatic and manual defrosting.

Construction

- No water connections required.
- Ventilator swinging hinged panel for access to the evaporator for cleaning.
- Waste water can be plumbed into drain, but can also be collected in an optional waste container.
- Environmentally friendly: R452a as refrigerant gas.
- Built-in refrigeration unit.
- Removable magnetic door gasket with hygienic design.
- 5 levels available. Usable with 5 GN 1/1 or 600x400 mm trays (h = 65 mm).
- Main components in 304 AISI stainless steel.
- Evaporator with antirust protection.
- Hygienic shape with rounded corners (and drain for easy cleaning).
- Automatic heated door frame.
- Door reversible on site.
- Door stopper to keep the door open in order to avoid the formation of bad smells (kit available to be mounted on site, depending on preferred door hinge).
- IP21 protection index.

APPROVAL: _____



Sustainability

- Holding at +3 °C for chilling or -20 °C for freezing, automatically activated at the end of each cycle, to save energy and maintain the target temperature (manual activation is also possible).
- High density polyurethane insulation, 60 mm thickness, HCFC free.


Included Accessories

- 1 of 1 single-sensor probe for blast chiller and blast chiller&freezers PNC 880213
- 1 of Removable tray support rack for 20 GN 1/1 PNC 881010


Optional Accessories

- Connectivity kit for AOC/EasyLine and CW Blast Chillers/Blast Chiller Freezers (ECAP) PNC 880183
- 1 single-sensor probe for blast chiller and blast chiller&freezers PNC 880213
- 2 extra single-sensor probes for blast chiller/freezers PNC 880214
- Rilsan grid 600x400mm PNC 880864
- Removable tray support rack for 20 GN 1/1 PNC 881010
- Plastic coated grid, 1/1GN PNC 881061
- Rack rails for vertical blast chiller and blast chiller&freezer PNC 881182
- Kit 4 wheels for blast chiller/freezers crosswise 100 kg PNC 881297
- Roll-in guide runners for 28 kg blast chillers and blast chiller&freezers 1/1GN PNC 881518
- Pair of 1/1GN AISI 304 stainless steel grids PNC 921101
- Pair of AISI 304 stainless steel grids, GN 1/1 PNC 922017
- AISI 304 stainless steel grid, GN 1/1 PNC 922062
- Trolley for 20x1/1GN roll-in rack PNC 922132
- Base for 20x1/1GN roll-in rack PNC 922141
- KIT HACCP EKIS PNC 922166
- 60mm pitch roll-in rack for 20x1/1GN (included with the oven) PNC 922203
- 80mm pitch roll-in rack for 20x1/1GN PNC 922205
- AISI 304 stainless steel bakery/pastry grid 400x600mm PNC 922264
- IoT module for blast chiller/freezers crosswise PNC 922419

Front

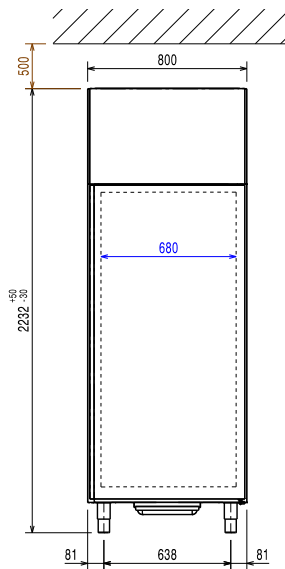


Side

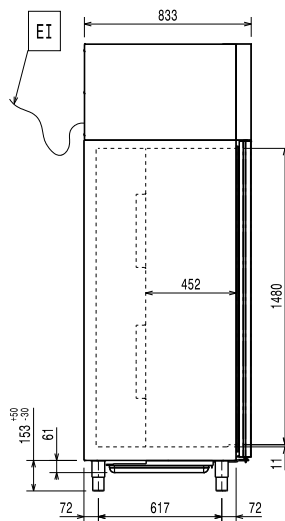

EI = Electrical inlet (power)

Top

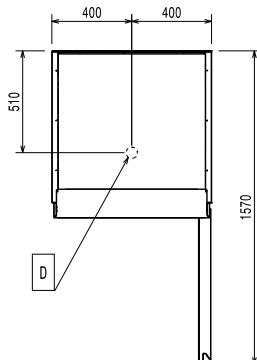

Electric

Supply voltage:

725222 (ECBCFA100SE) 380-415 V/3N ph/50 Hz

Electrical power max.:

4.4 kW

Circuit breaker required

Installation:

Clearance:

5 cm on sides and back.

Please see and follow detailed installation instructions provided with the unit

Capacity:

Trays type:

GN 1/1;600x400

Key Information:

External dimensions, Width: 800 mm

External dimensions, Depth: 835 mm

External dimensions, Height: 2230 mm

Net weight: 235 kg

Shipping weight: 268 kg

Shipping volume: 1.83 m³

Refrigeration Data

Refrigeration power at

evaporation temperature: -5 °C

Condenser cooling type: AIR

Test performed in a test room at 30°C to chill/ freeze (+10° C/-18° C) a full load of 40mm deep trays filled with mashed potatoes evenly distributed up to a height of 35 mm at starting temperature between 65° and 80°C within 120/270min.

Product Information (EN17032 – Commission Regulation EU 2015/1095)

Chilling Cycle Time (+65°C to +10°C):

106 min

Full load capacity (chilling):

95 kg

Freezing Cycle Time (+65°C to -18°C):

263 min

Full load capacity (freezing):

65 kg

Sustainability

Refrigerant type:

R452A

GWP Index:

2141

Refrigeration power:

9054 W

Refrigerant weight:

2400 g

Energy consumption, cycle (chilling):

0.073 kWh/kg

Energy consumption, cycle (freezing):

0.222 kWh/kg