

Blast Chiller/Freezer

BLC Range

Features and Benefits


- Fully automatic
- Fan assisted cooling
- Adjustable feet
- Digital controller and temperature display
- Replaceable door gasket
- Temperature probe
- 4 Pre-settable programs
- Accepts 1/1 Gastronorm and 60x40 Euronorm pans (not supplied)
- Self closing door
- BLC3 (Chill +70°C to +3°C) 10kg in 90 mins
- BLC3 (Freeze +70°C to -18°C) 8kg in 240 mins
- BLC5 (Chill +70°C to +3°C) 18kg in 90 mins
- BLC5 (Freeze +70°C to -18°C) 12kg in 240 mins
- BLC10 (Chill +70°C to +3°C) 36kg in 90 mins
- BLC10 (Freeze +70°C to -18°C) 25kg in 240 mins
- BLC14 (Chill +70°C to +3°C) 50kg in 90 mins
- BLC14 (Freeze +70°C to -18°C) 35kg in 240 mins
- Door not reversible

Technical Specifications

Temperature Range	+70/-18°C
Refrigerant	BLC3/BLC5 - R290, BLC10/BLC14 - R404a
Type of Defrost	Automatic
Exterior Finish	Stainless Steel
Interior Finish	Stainless Steel
Power Required	13 Amp, BLC14 - 3 Phase
Max Ambient	18°C to 38°C
Climate Class	ST



BLC14

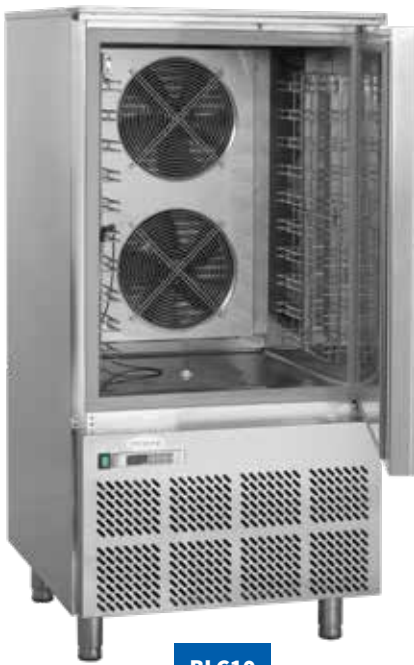

BLC10



BLC3P



BLC5P

Model	Description	Dimensions (mm)			Kg	No. of Shelves	Price	Next Day
		Ext.	H	W	D			
BLC3P	3 Tray	Ext.	925	800	815	117	3 (Not supplied)	✓
		Int.	330	660	420			
BLC5P	5 Tray	Ext.	995	800	815	120	5 (Not Supplied)	✓
		Int.	400	660	420			
BLC10	10 Tray	Ext.	1625	800	815	170	10 (Not supplied)	✓
		Int.	870	660	420			
BLC14	14 Tray	Ext.	2170	800	815	205	14 (Not supplied)	✗
		Int.	1150	660	420			