



Electrolux

Modular Cooking Range Line
700XP One Well Freestanding
Electric Fryer 14 liter



Modular Cooking Range Line
700XP One Well Freestanding Electric
Fryer 14 liter

371084 (E7FRED1FF0)

14-lt electric fryer free
standing with 1 well and 1
basket, internal heating
elements

Short Form Specification

Item No.

To be installed on height adjustable feet in stainless steel. High efficiency tilting incoloy armoured heating elements (8.7kW) placed inside the well. Deep drawn well. Oil drains through a tap into a container under the well. Exterior panels in stainless steel with Scotch Brite finish. One piece pressed work top in 1.5 mm thick stainless steel. Right-angled side edges to allow flush-fitting junction between units.

ITEM # _____
MODEL # _____
NAME # _____
SIS # _____
AIA # _____

Main Features

- Unit to be mounted on height adjustable feet in stainless steel.
- High efficiency tilting heating elements attached inside the well.
- Thermostatic regulation of oil temperature up to a maximum of 185 °C.
- Overheat protection thermostat as standard on all units.
- Oil drains through a tap into a drainage container positioned under the well.
- All major compartments located in front of unit for ease of maintenance.
- IPX 4 water protection.

Construction

- Interior of well with rounded corners for ease of cleaning.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.

700XP One Well Freestanding Electric Fryer 14 liter
Modular Cooking Range Line



Electrolux

**Modular Cooking Range Line
700XP One Well Freestanding
Electric Fryer 14 liter**

Included Accessories

- 1 of Door for open base cupboard
- 1 of Full size basket for 14 and 15lt free standing fryers

Optional Accessories

• 4 wheels, 2 swivelling with brake (700/900XP). It is mandatory to install with base supports for feet/wheels.	PNC 206135	□	• 2 side covering panels, h=700mm, d=700mm	PNC 216000	□
• Flanged feet kit	PNC 206136	□	• Frontal handrail 400mm	PNC 216046	□
• Frontal kicking strip for concrete installation, 200mm	PNC 206146	□	• Frontal handrail 800mm	PNC 216047	□
• Frontal kicking strip for concrete installation, 400mm	PNC 206147	□	• Frontal handrail 1200mm	PNC 216049	□
• Frontal kicking strip for concrete installation, 800mm	PNC 206148	□	• Frontal handrail 1600mm	PNC 216050	□
• Frontal kicking strip for concrete installation, 1000mm	PNC 206150	□	• Large handrail - portioning shelf, 400mm	PNC 216185	□
• Frontal kicking strip for concrete installation, 1200mm	PNC 206151	□	• Large handrail - portioning shelf, 800mm	PNC 216186	□
• Frontal kicking strip for concrete installation, 1600mm	PNC 206152	□	• Full size basket for 14 and 15lt free standing fryers	PNC 921691	□
• Frontal kicking strip, 200mm (not for refr-freezer base)	PNC 206174	□	• 2 half size baskets for 12, 14 and 15lt fryers	PNC 921692	□
• Frontal kicking strip, 400mm (not for refr-freezer base)	PNC 206175	□	• Filter for fryer oil collection basin for 7lt, 14lt, 15lt free standing fryers	PNC 921693	□
• Frontal kicking strip, 800mm (not for refr-freezer base)	PNC 206176	□			
• Frontal kicking strip, 1000mm (not for refr-freezer base)	PNC 206177	□			
• Frontal kicking strip, 1200mm (not for refr-freezer base)	PNC 206178	□			
• Frontal kicking strip, 1600mm (not for refr-freezer base)	PNC 206179	□			
• 4 feet for concrete installation	PNC 206210	□			
• Pair of side kicking strips	PNC 206249	□			
• Pair of side kicking strips for concrete installation	PNC 206265	□			
• Oil drain pipe for 15lt free standing fryer	PNC 206301	□			
• Chimney upstand, 400mm	PNC 206303	□			
• Right and left side handrails	PNC 206307	□			
• Door for open base cupboard	PNC 206350	□			
• Base support for feet or wheels - 400mm (700/900XP)	PNC 206366	□			
• Base support for feet or wheels - 800mm (700/900)	PNC 206367	□			
• Base support for feet or wheels - 1200mm (700/900)	PNC 206368	□			
• Base support for feet or wheels - 1600mm (700/900)	PNC 206369	□			
• Base support for feet or wheels - 2000mm (700/900)	PNC 206370	□			
• Rear paneling - 600mm (700/900XP)	PNC 206373	□			
• Rear paneling - 800mm (700/900)	PNC 206374	□			
• Rear paneling - 1000mm (700/900)	PNC 206375	□			
• Rear paneling - 1200mm (700/900)	PNC 206376	□			
• Chimney grid net, 400mm	PNC 206400	□			

**Modular Cooking Range Line
700XP One Well Freestanding Electric Fryer 14 liter**

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.


2014.06.26






Electrolux


Modular Cooking Range Line 700XP One Well Freestanding Electric Fryer 14 liter

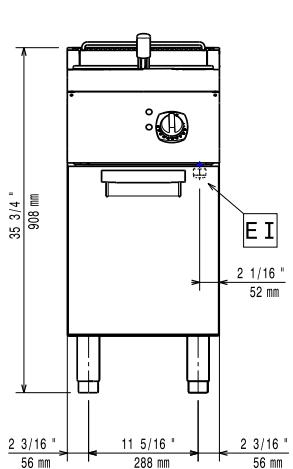

Front

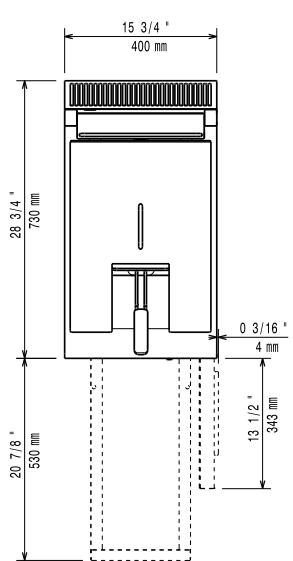

Top

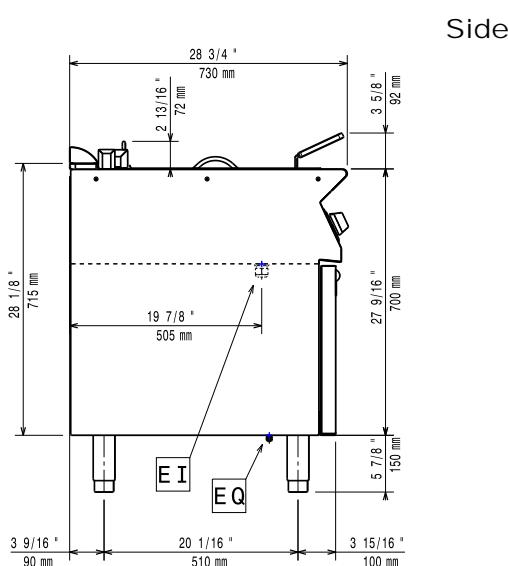

Electric

Supply voltage:

371084 (E7FRED1FF0)

400 V/3N ph/50/60 Hz

Total Watts:

8.7 kW

Key Information

Usable well dimensions (width): 240 mm

Usable well dimensions (height): 285 mm

Usable well dimensions (depth): 380 mm

Well capacity:

12 lt MIN; 14 lt MAX

Thermostat Range:

105 °C MIN; 185 °C MAX

Net weight:

35 kg

Shipping weight:

55 kg

Shipping height:

1140 mm

Shipping width:

460 mm

Shipping depth:

820 mm

Shipping volume:

0.43 m³

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

EI = Electrical connection



Modular Cooking Range Line
700XP One Well Freestanding Electric Fryer 14 liter

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2014.06.26